


# OpenGear Converter Audio to SDI

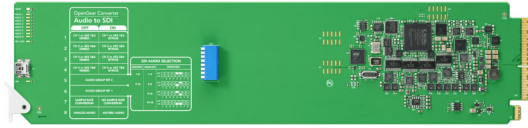

Besitzt alle Voraussetzungen, um entweder 4 analoge Audiokanäle oder 8 digitale AES/EBU Audiokanäle in eine SDI-Videoleitung einzuschleifen. Betten Sie Audio Ihres Mischpults oder analogen Videozuspielers in ein SDI-Signal ein und benutzen Sie es mit SDI-Routern oder MAZen. Sie können damit ebenfalls zusätzliche Audiokanäle an Video-Konverter anschließen!

549 €\*  


---

## Anschlüsse

### SDI Video Input

Switchable between SD, HD and 3Gb/s SDI.

---

### SDI Video Output

Automatically matches the SD, HD and 3Gb/s SDI video input.

---

### Analog Audio

4 channels of professional balanced analog audio with openGear™ standard 3 pin connections.

### AES/EBU Digital Audio

8 channels of professional balanced digital with openGear™ standard 3 pin connections.

---

### SDI Redundant Input

Automatically switches over if main SDI input is lost.

---

### Multi Rate Support

Auto detection of SD, HD and Level B 3 Gb/s SDI inputs.


### Updates and Configuration

Via USB 2.0 high speed. (480 Mb/s)

---

### Reclocking

Yes

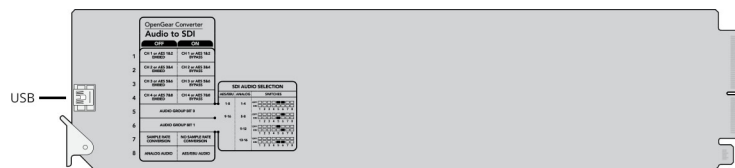

---

## Normen

### SDI Compliance

SMPTE 292M, SMPTE 259M, SMPTE 296M, ITU-R BT.656 and ITU-R BT.601.

---

### SDI Video Rates

SDI video connections are switchable between standard definition and high definition.

---

### SDI Video Sampling

4:2:2

---

### SDI Audio Sampling

Television standard sample rate of 48 kHz and 24-bit.

---

### SDI Color Precision

4:2:2

---

### SDI Color Space

YUV

---

### SDI Auto Switching

Automatically selects between SD-SDI, HD-SDI and 3 Gb/s SDI.

---

### SDI Format Support

625/25 PAL, 525/29.97 NTSC, 1080PsF23.98, 1080PsF24, 1080PsF25, 1080i50, 1080i59.94, 1080i60, 720p50, 720p59.94 and 720p60.

---

---

## Software

### Software Control

Mac OS X™ and Windows™ software upgrade via USB.

### Internal Software Upgrade

Via included updater application.

---

---

## Betriebssysteme



Mac OS X 10.10 Yosemite, Mac OS X 10.11 El Capitan oder höher.



Windows 8.1 oder Windows 10.

---

---


## Settings Control

OpenGear DashBoard network control software, Mini Switches or USB software.

---

---

## Physische Spezifikationen

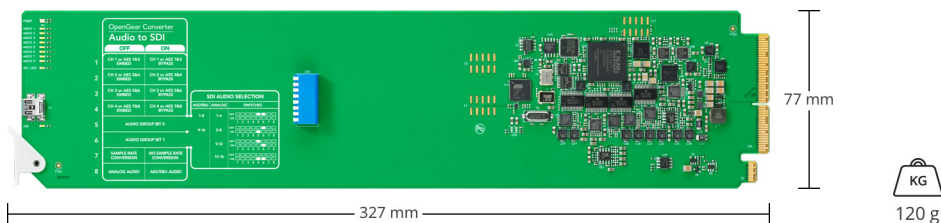

---

## Umgebungsbedingungen

### Operating Temperature

0° to 40° C (32° to 104° F)

### Storage Temperature

-20° to 45° C (-4° to 113° F)

### Relative Humidity

0% to 90% non-condensing

---

---

## Was ist im Lieferumfang enthalten

OpenGear Converter Audio to SDI

---

## Garantie

3 Year Limited Manufacturer's Warranty.

---

Für alle Elemente auf dieser Website gilt das Copyright von Blackmagic Design Pty. Ltd. 2016;  
Alle Rechte vorbehalten. Alle Handelsmarken sind Eigentum ihrer jeweiligen rechtmäßigen Besitzer.  
\*Unverbindliche Preisempfehlung inkl. MwSt zuzüglich Versand- und Zustellungskosten.

Zugelassene Blackmagic Design Reseller