

Blackmagic URSA Studio Viewfinder

When you're working live in the studio or out at an event in a large venue such as a stadium, the URSA Studio Viewfinder gives you everything you need to comfortably operate your URSA Mini in live production! The bright 7" screen has a detachable sunshade and includes large handles and an articulated pivot mount that let you position and move the viewfinder independent of the camera! You get tactile control dials and customizable function buttons to make adjustments on the fly, without having to take your eyes off the action! Set up is quick and easy using the included V-Lock plate and it connects directly to the SDI monitor and power output on your URSA Mini, so you don't need additional cables or power supplies.

\$1,795

Connections

SDI Video Input

1 x HD/Ultra HD 3G-SDI via BNC.

Screen Dimensions

7" 1920 x 1200 resolution.

Computer Interface


1 x USB type C connector for initial setup and software updates via Blackmagic Camera Setup software.

Power Input

1 x 4 pin XLR 12V.

Screen Type

7" IPS LCD.

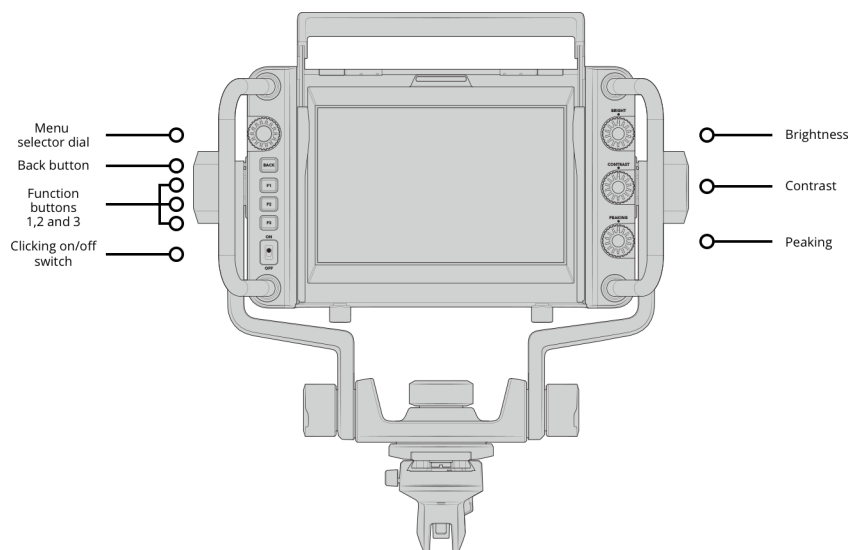

SDI Video Standards

HD Format Support

720p50, 59.94, 60.
1080p23.98, 24, 25, 29.97, 30, 50, 59.94,
60 .
1080i50, 59.94, 60.

SDI Compliance

SMPTE 259M, SMPTE 292M, SMPTE 296M,
SMPTE 425M 2084.

Video Sampling

4:2:2 YUV, 4:4:4 RGB.

Color Precision

10-bit.

Color Space

REC 601, REC 709, REC 2020.

Multiple Rate support

SDI switches between 1.5 Gb/s HD
and 3.0 Gb/s 60P HD.

Monitor Features

Controls

Dial, knobs and customizable function
buttons for settings, short cut features
and navigating menus.

Handles

Built in grab handles for positioning the
monitor independently from the camera.

Position Adjustment Options

Variable tension pivot points for
articulated arm and grab handles with
forward, backward, up, down, pan and tilt
adjustments.

Mounting Options

Quick release V-lock mounting
bracket for attaching viewfinder to
URSA Mini handle.

Tally

Large LED tally light with customizable
perspex camera numbers.

Metadata Support

Detects camera information
embedded in the SDI signal including
status information, frame guides,
focus peaking, tally, and more.

Screen Interface

On screen meters and status
information including Camera ID,
resolution, frames per second,
shutter speed, gain, white balance,
camera battery level, and more.

3D Lookup Table Support

LUT support for loading custom LUTs.

Operating Systems



Mac OS X 10.10 Yosemite,
Mac OS X 10.11 El Capitan
or later.




Windows 8.1 or
Windows 10.

Power Requirements

12V power input via 4 pin XLR connected via URSA Mini 12v power output.

Physical Specifications

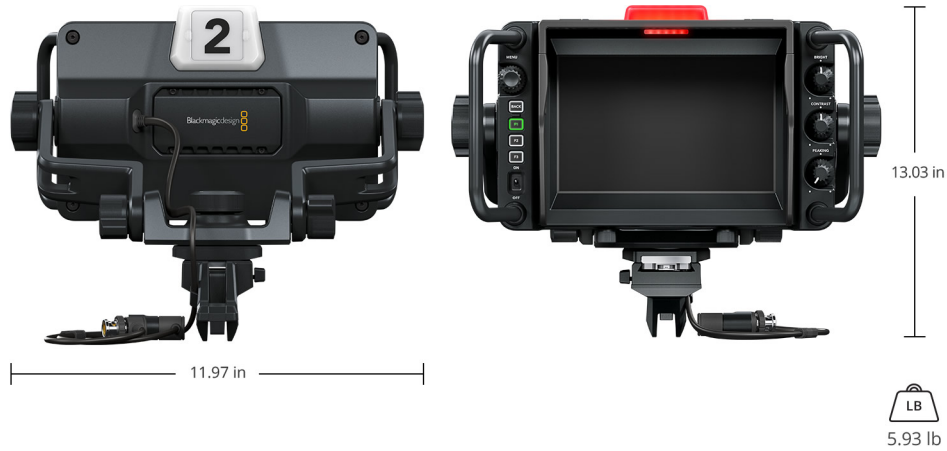

Environmental Specifications

Operating Temperature
0° to 40° C (32° to 104° F)

Storage Temperature
-20° to 60° C (-4° to 140° F)

Relative Humidity
0% to 90% non-condensing

What's Included

Blackmagic URSA Studio Viewfinder

Warranty

12 Month Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2016, all rights reserved.
All trademarks are property of their respective owners. MSRP excludes sales taxes/duties and shipping costs.

Blackmagic Design Authorized Reseller