

# LYKOS

Controllable lighting for beautiful images.



powered by  Litepanels



**Manfrotto**  
Imagine More

 **Manfrotto™**  
A Vitec Group brand

[manfrotto.com](http://manfrotto.com)

# LYKOS

## Controllable lighting for beautiful images.

LYKOS daylight and bi-color are the newest and most powerful in LED lighting technology. Compact in design and lightweight, they offer the best portable solution for the photographer and videographer. LYKOS LED panels include an AC adaptor, ball head and gel filters and/or diffuser.

Maximise the potential from the LYKOS LED range and use in combination with the LYKOS LED softbox for superior diffusion. LYKOS LED panels are fully compatible with Manfrotto Digital Director when used with the LYKOS Bluetooth® Dongle. Download the iPhone LYKOS App to enable full control of one or more panels in combination with the LYKOS Bluetooth® Dongle.



LYKOS daylight



LYKOS bi-color



Ergonomic Design



Improved optical efficiency



Gel diffuser for daylight




Gel filter set for bi-color (Diffuser, CTO, 1/4 CTO)



AC adaptor



Ball-head with shoe

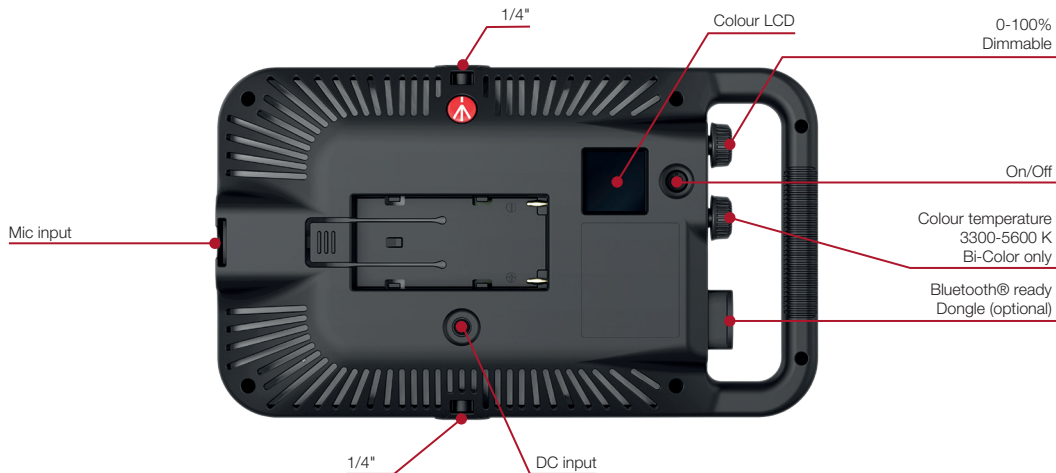


	LYKOS daylight	LYKOS bi-color
Product Code	MLL1500-D	MLL1300-BI
Dimensions	260mm x 152mm x 42mm 10.2in x 6in x 1.65in	260mm x 152mm x 42mm 10.2in x 6in x 1.65in
Lux @ 1m	1600 lux	Daylight: 1500 lux Tungsten: 1300 lux
Beam Angle	50°	50°
Colour Temp	5600°K	3000-5600°K
CRI	>93	>93
Dimming	0-100%	0-100%
Rear LCD Screen	Yes	Yes
AC Adapter	Included	Included
Battery (not included)	Sony L-Type Li-ion	Sony L-Type Li-ion
Wireless (Bluetooth® Dongle not included)	Yes	Yes
Light Modifiers (not included)	Yes	Yes
Ball Head	Yes	Yes
Gel Diffuser	CTO, 1/4 CTO and diffuser	Diffuser
D-Tap Connection	Optional	Optional

# LYKOS Accessories

## LYKOS Softbox MLSBOXL

Create beautiful soft lighting with the Manfrotto LED LYKOS Softbox, the perfect accessory to be used in combination with LYKOS LED panels.

The diffuser film is specifically designed for LED lighting and reduces the light output by 1.3 stops. The inner reflective surface guarantees maximum optical efficiency.



20x24x6cm



Diffuser film  
Lighting f-stops: -1.3



Compatible with  
Manfrotto LYKOS LED

## LYKOS Bluetooth® Dongle MLLBTDONGLE

Add wireless connectivity to Manfrotto LYKOS LED panels with the LYKOS Bluetooth® Dongle. Download the iPhone LYKOS App to enable full control of one or more LED panels or use with Manfrotto Digital Director.




APP FOR  
iPhone



# CROMA2

## Perfect lighting for beautiful images.

Powerful and compact, the CROMA2 features the newest LED Surface Mount Technology which guarantees images with perfect colour rendition. The LED panel embeds innovative lenses which have been designed to achieve improved optical efficiency. Compact and powerful, it can be used both on camera and off. Colour temperature can be regulated from 3300K to 5600K, making CROMA2 the perfect versatile LED panel to match the existing ambient lighting. Diffuser gel in included.

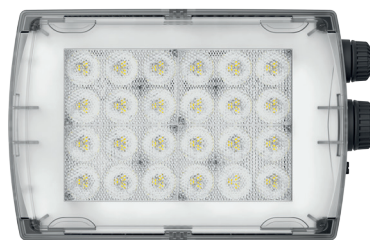


### CROMA2

Product Code	MLCROMA2
Dimensions	170mm x 108mm x 44mm (6.7in x 4.3in x 1.7in)
Mounting Method	Tripod/hotshoe/female 1/4"
Battery Type	AA batteries
Battery Capacity	6x NiMH - 40min, Li-ion L-Type - 180min
Beam Angle	50°
Colour Temperature (K)	Daylight 5600K / Tungsten 3100K
CRI	>93
Dimming	1-100% without flickering
Illuminance (lux)	Daylight 900 lux / Tungsten 800 lux
Gel Filters included	Diffuser
D-Tap connection	Optional
AC Adaptor	Included

# MICROPRO2

## Perfect lighting for beautiful images.

Powerful and compact, the MICROPRO2 features the newest LED Surface Mount Technology which guarantees images with perfect colour rendition. The LED panel embeds innovative lenses which have been designed specifically to achieve improved optical efficiency. Compact yet powerful, it can be used both on camera and off. Diffuser and filter gel for colour correction are included.

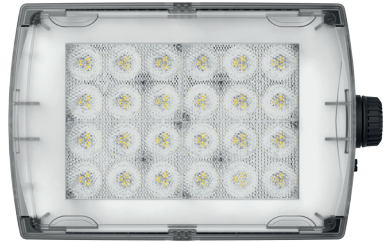

### MICROPRO2

Product Code	MLMICROPRO2
Dimensions	170mm x 108mm x 44mm (6.7in x 4.3in x 1.7in)
Mounting Method	Tripod/hotshoe/female 1/4"
Battery Type	AA batteries
Battery Capacity	NiMH - 40 min, Li-ion L-Type - 180 min
Beam Angle	50°
Colour Temperature (K)	Daylight 5600K
CRI	>93
Dimming	1-100%
Illuminance (lux)	940 lux
Gel Filters included	CTO, 1/4 CTO and diffuser
D-Tap connection	Optional
AC Adaptor	Included

# SPECTRA2

Professional lighting has never been so portable.

The most compact LED Panel in the professional range. Spectra2 features the state of the art LED Surface Mount Technology which guarantees images with perfect colour rendition and improved efficiency. Compact and portable, it is perfect for on and off camera. Diffuser and filter gel for colour correction are included.



## SPECTRA2

Product Code	MLSPECTRA2
Dimensions	153mm x 93mm x 45mm (6.0in x 3.7in x 1.7in)
Mounting Method	Tripod/hotshoe/female 1/4"
Battery Type	AA batteries
Battery Capacity	6x NiMH - 110 min, Li-ion L-Type - 160 min
Beam Angle	45°
Colour Temperature (K)	Daylight 5600K
CRI	>93
Dimming	1-100% without flickering
Illuminance (lux)	650 lux (+50% light output with boost mode)
Gel Filters included	CTO, 1/4 CTO and diffuser
D-Tap connection	Optional
AC Adaptor	Optional



Address



**Manfrotto**  
Imagine More