

Panasonic

BUSINESS

AK-UC3300

4K Studio Camera



High-quality images that exceed expectations.
4K studio camera with high sensitivity,
low noise and excellent color reproduction



Worldwide
Olympic Partner



Worldwide
Paralympic Partner



* This unit does not support Build-up Units. When using box lenses, a lens supporter from the lens manufacturer is required.

Overwhelming image quality with a resolution of 2,000 TV lines.

The camera is equipped with a large 11.14-megapixel 4K image sensor and uses oversampling to achieve horizontal and vertical resolution of 2,000 TV lines. An S/N ratio of 62 dB or higher is maintained with a high sensitivity of F10/59.94 Hz, F11/50 Hz enabling shooting of expressive, high-quality video.



4K Studio Camera
AK-UC3300GJ
(Tajimi connector model)

4K Studio Camera
AK-UC3300GSJ
(LEMO connector model)



* This unit does not support Build-up Units. When using box lenses, a lens supporter from the lens manufacturer is required. Lens and viewfinder are optional accessories.

11.14-megapixel 4K image sensor

With a large 11.14-megapixel 4K image sensor, high sensitivity of F10/59.94 Hz, F11/50 Hz (2,000 lx) and low noise with an S/N ratio of 62 dB or higher are achieved. In addition, oversampling achieves a resolution of 2,000 TV lines in the horizontal and vertical directions for a richly detailed high-resolution images.



HD Hi-Speed mode support

2x high-speed shooting is supported in 1080p, 1080i and 720p.

HD Hi-Speed output (when in Hi-Speed mode)

1080/59.94p-120fps, 1080/50p-100fps, 1080/59.94i-120fps,
1080/50i-100fps, 720/59.94p-120fps, 720/50p-100fps

Diverse outputs from CCU*1

This camera supports the uncompressed 12G-SDI output that is needed in the 4K age. Light compression technology called TICO*2 is also used, enabling 4K video to be sent by 3G-SDI without losing video quality, enabling current HD infrastructure to be used for 4K video transmission. The IP/12G/3G Interface Kit AK-NP600G (optional accessory) can be equipped for SMPTE ST2110*3 support.

*1: AK-UCU600PJ/UCU600EJ/UCU600PSJ/UCU600ESJ.
*2: A codec developed by intoPIX. Short for "Tiny Codec".
*3: When in HD mode. See page 5 for details.

4K/HD multi-format support

Multiple 4K/HD formats are supported, enabling use adapted to the operation application.

Supported formats (when connected to AK-UCU600)

UHD	2160/59.94p, 2160/50p, 2160/29.97p, 2160/25p, 2160/23.98p, 2160/29.97PsF, 2160/25PsF, 2160/23.98PsF, 2160/23.98PsF & over 59.94i
HD	1080/59.94p, 1080/50p, 1080/59.94i, 1080/50i, 1080/29.97PsF, 1080/25PsF, 1080/23.98PsF, 720/59.94p, 720/50p

Low-skew shooting

The AK-UC3300GJ/UC3300GSJ supports a high reading speed of 1/100 of a second, compared to 1/60 of a second on standard cameras. The skewing characteristic of MOS sensors has been reduced by reading out the MOS sensor signal at high speed.

Skew reduction images

* Images are simulated.



Standard camera (1/60 sec.)




AK-UC3300 (1/100 sec.)

B4 mount

The 2/3 lens can be used without an external adaptor, and the internal lens is specially designed for large sensors, ensuring high video quality. This new acquisition method maximizes the effectiveness of incident light.

Camera block image

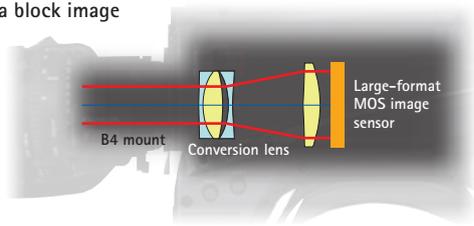

* Images are simulated.

Digital extender (2x)

Video image size is doubled by the digital signal processing circuit, enabling high-magnification shooting even with low-magnification lenses. Sufficient resolution is maintained even when the image is magnified and the light reduction seen with extender lenses is prevented.

Built-in optical filter

The internal ND filter can be used in various shooting environments.
ND filters: Through, 1/4, 1/16, 1/64

Chromatic Aberration Compensation (CAC)

This exclusive technology utilizes communication between the lens and camera to deploy a sophisticated algorithm that automatically compensates for registration errors caused by lens chromatic aberration and minimizes the circumjacent blur.

Focus assist functions

Quick and accurate focusing is supported with focus assist functions such as Focus Bar (indicates focus level), Focus-in-Red (uses color to indicate areas in focus), MAG (magnifies central portion), and Square (shows focus status of screen as a whole). Lenses with auto focus and focus assist capabilities are also supported^{*1}. The Remote Operation Panel (ROP) can also be used to focus and zoom while using the digital lens.


Focus assist function examples



Focus-in-Red



MAG



Doll in focus



Panel in focus

Focus Square

*1: Contact lens manufacturers for compatible lenses.

*2: Does not function when in 4K mode.

*3: If the transmission distance is extended by connecting fibers at multiple points, the distance will be reduced due to signal attenuation. Use of repeaters as appropriate is also recommended.

HDR (High Dynamic Range)

This mode provides rich gradation to render contrast, color and shadow in highlights and dark image areas that could not previously be reproduced due to overexposure and black defects respectively, resulting in more realistic image quality. Variable HDR that makes optimal adjustments for a wide dynamic range is supported. In addition, it is possible to configure a system supporting simultaneous 4K HDR/SDR in order to handle production environments with both. The SDR signal can suppress blown-out highlights with the offset gain function from the HDR, and the same knee adjustment as for HDR can be performed for highlights.

* Images are simulated.



SDR



HDR

Wide color range with ITU-R BT.2020

This camera is compatible with ITU-R BT.2020, a color space that can recreate almost every color in the natural world, enabling visual expression with excellent color reproduction.

Flash band correction^{*2}

The problem of flash bands (a phenomenon whereby dark and light areas are produced in the same frame when the flash is released) is resolved by the high-precision flash band detection and correction of the camera signal processing LSI.

Diverse color correction functions

In addition to EBU and NTSC preset color matrices, users can perform 12-pole color correction and individual adjustment of saturation and hue with a linear matrix. In addition, the separate skin color adjustment function (Skin Correction) enables more fine-tuned color expression.

Skin tone detail correction

Tone down wrinkles and blemishes in on air personalities to beautifully shoot natural skin tones. Not limited to skin tones, this correction feature can be applied to any hue phase and can define three independent tone ranges for correction. A function to select and directly adjust a specific color is also included.

Shockless gain

It is possible to smoothly transition the image changes that occur when the gain is changed. In addition, with the 0.1 dB step master gain adjustment function, you can fine tune the adjustments to match the scene being shot.


Long-distance transmission

Long-distance transmission of uncompressed video signals to the Camera Control Unit (CCU) via optical fiber is supported. Transmission of approximately 2 km is possible when power is supplied from the CCU. In addition, the transmission distance can be extended up to 10 km by using an external power supply for the camera and general-purpose optical transmission equipment^{*3}. In addition to a dedicated serial line, IP connection via LAN cable is also supported for control between the CCU and the Remote Operation Panel (ROP).

Video and data transmission (TRUNK)


Video and data can be transmitted between the camera and CCU using only an optical cable, enabling the system to be upgraded according to the operating conditions.

- **HD-SDI (CCU→camera) two lines (internal FS), VBS (CCU→camera) two lines:** This line can be used for monitoring (studio floor monitor) with a prompter, fixed return or camera, etc.
- **HD-SDI (camera→CCU) one line (internal FS):** This line can be used to output video from a handheld or PTZ Camera in the studio or the field, etc. to the CCU (system). Since the camera video input is equipped with a frame synchronizer, asynchronous video signals can also be used.
- **LAN (1000BaseT) one line:** To be used to control external devices and PTZ Cameras by IP protocol. Transmission of streaming video is also supported.
- **DATA (RS422A or RS232C) two lines:** These lines can be used to transfer lens and pedestal position data in a virtual system.

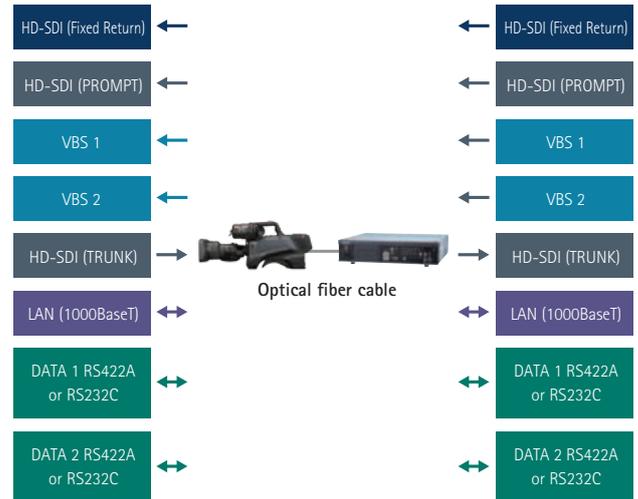

Detailed settings and functions optimized for operability

- For camera head output (HD-SDI 1/HD-SDI 2), it is possible to select 1080p, 1080i, and 720p.
- Color temperature display and adjustment function (2000 K to 15000 K variable).
- Camera settings, such as video adjustments, can be saved to an SD memory card.
- The lens file function enables flare and shading values to be saved.
- Support for IP control.
- There are four user buttons on the camera head, with four on the AK-HVF100GJ LCD viewfinder and three on the AK-HVF75GJ LCD viewfinder.
- Two intercom lines can be connected with separate intercom lines.

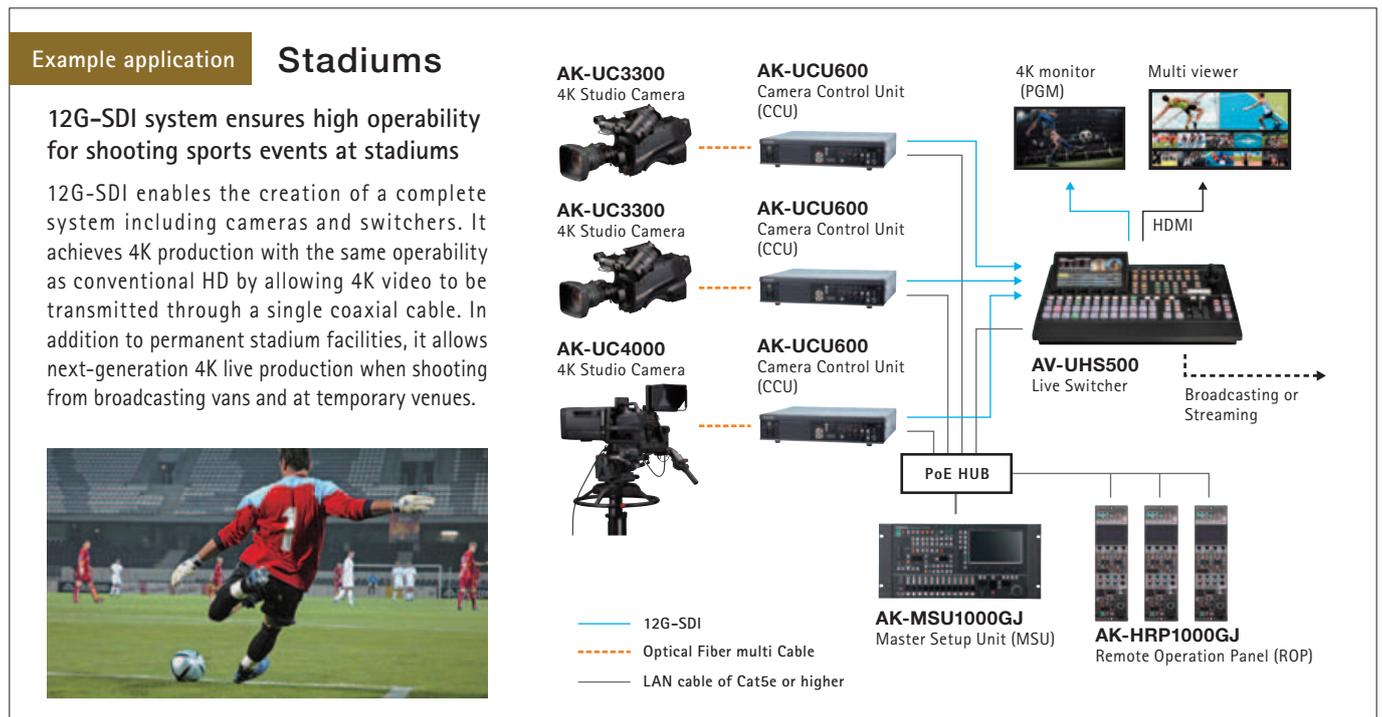

Options

AK-HVF75GJ
17.8 cm (7 inches)
LCD Color Viewfinder



AK-HVF70G
17.8 cm (7 inches)
LCD Color Viewfinder



*Limited Stock

AJ-CVF25GJ NEW
87.6 mm (3.45 inches)
Color HD EVF



AJ-CVF50GJ
38.1 mm (1.5 inches)
HD EVF



AJ-HVF21KG
50.8 mm (2 inches) HD EVF
*Not available in some areas.



AJ-MC700P
Microphone Kit (monaural)

AW-PS551
AC Adaptor
* For AK-MSU1000GJ. Can not use for power supply to AK-UC3300.

SHAN-TM700
Tripod Adaptor

AJ-C10050G
Remote Control Cable

AJ-MH800G
Microphone Holder

Uncompressed 12G-SDI output supported for 4K video.

AK-UCU600PJ
AK-UCU600EJ


Camera Control Unit (CCU)
(Tajimi connector model)

AK-UCU600PSJ
AK-UCU600ESJ

Camera Control Unit (CCU)
(LEMO connector model)

- Equipped with two UHD 12G-SDI output lines. Two-sample interleave and square division supported with 3G-SDI Quad Link.
- TICO*1 over SDI (4K over 3G-SDI) output supported (4K signal can be transmitted by a conventional 3G-SDI cable).
- Supports 1080p/i and 720p. In addition to standard output, high-speed output*2 at 2x can be selected.
- HDR/SDR simultaneous output and HDR BT.2020/BT.709 simultaneous output supported.

*1: A codec developed by intoPIX. Short for "Tiny Codec". *2: When in HD Hi-Speed mode.

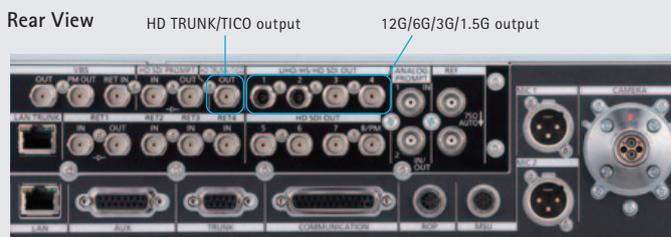

Optional IP kit for installation on the rear terminal of the AK-UCU600

AK-NP600G


IP/12G/3G Interface Kit



- SMPTE ST2110 standard compliant
- Supported formats: 1080/59.94p, 50p, 59.94i, 50i, 720/59.94p, 50p

* SFP+ transceiver required.
Operation-verified SFP Module: Finisar Corporation
SFP+ Transceiver/FTLX1475D3BTL

AK-NP600G installed on the rear terminal of the AK-UCU600

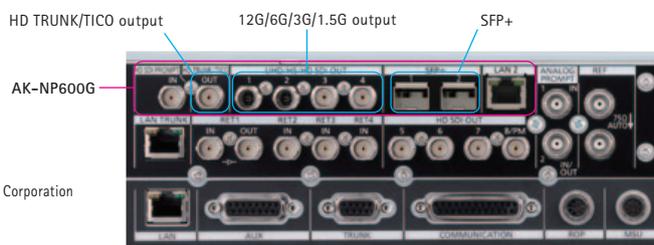

* Two 12G outputs or one 3G x 4 output and one TICO output in UHD mode. Four HD (3G/1.5G) outputs and two SFP+ (ST2110) outputs are supported in HD mode. * AK-NP600G (IP/12G/3G Interface Kit) does not support analog VBS input/output signals (OUT/PM OUT/RET IN). * AK-UC3300 (4K Studio Camera) and AK-UCU600 (Camera Control Unit) firmware upgrades are required to install AK-NP600G (IP/12G/3G Interface Kit). See Service and Support/PASS on the Panasonic website for details (<https://pro-av.panasonic.net/en/>). * Consult with your Panasonic dealer about AK-NP600G (IP/12G/3G Interface Kit) installation.

Compact operation panels that support IP control and PoE*1 power supply.

AK-HRP1000GJ

Remote Operation Panel (ROP)

AK-HRP1015GJ NEW

Remote Operation Panel (ROP)

Coming soon
* Not available in some areas.

AK-HRP250GJ NEW

Remote Operation Panel (ROP)

- Camera serial control and IP control are possible. Panasonic 4K/HD Integrated Cameras are supported*2.
- Equipped with joystick control lever. IRIS/PEDESTAL operation is possible.
- Equipped with scene file function.
- Equipped with SD memory card slot. Saving of user files and firmware version updates are supported.
- IP connection and PoE*1 power supply are supported. The AK-HRP250GJ is equipped with a robust LAN terminal connector.



AK-HRP1000GJ AK-HRP1015GJ AK-HRP250GJ

*1: Abbreviation of Power over Ethernet. *2: AK-HRP250GJ and 4K/HD Integrated Camera support is planned in future. AK-HRP1015GJ and 4K/HD Integrated Camera support is planned in the first quarter of CY2021.

Up to 99 CCUs can be connected and controlled.

AK-MSU1000GJ

Master Setup Unit (MSU)



- IP connection: up to 99
- Serial connection: up to 6
- Equipped with 17.8cm (7 inches) LCD menu touch panel.

Equipped with high-resolution 22.9 cm (9 inches) LCD panel and new lift mechanism.

AK-HVF100GJ

22.9 cm (9 inches) LCD Color Viewfinder



- Equipped with full HD (1920 x 1080) 22.9 cm (9 inches) color LCD panel.

Equipped with high-resolution 1.78 cm (0.7 inches) full HD OLED panel.

AJ-CVF70GJ NEW

1.78 cm (0.7 inches) Full HD OLED Color Viewfinder



- Equipped with 1.78 cm (0.7 inches) full HD OLED panel and 38mm large-diameter eyepiece.

Specifications

4K Studio Camera AK-UC3300GJ/UC3300GSJ

GENERAL	
Power Supply	DC 12 V (when using an external power supply) AC 240 V, 50 Hz/60 Hz (when AK-UCU600PJ/UCU600PSJ/UCU600EJ/UCU600ESJ is connected)
Power Consumption	119 W (maximum, when connecting to an external 12 V and including supply to an externally connected devices) 170 W (maximum, when AK-UCU600PJ/UCU600PSJ/UCU600EJ/UCU600ESJ is connected and including supply to an externally connected devices)
Ambient Operating Temperature	-10 °C to 45 °C (14 °F to 113 °F) (Preheating required under a temperature 0 °C (32 °F) or below)
Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Ambient Operating Humidity	85% or less (relative humidity)
Weight	Approx. 4.3 kg (9.46 lbs.) (body only, excluding the accessories)
Dimensions (W x H x D)	Body only 151 mm x 267 mm x 374 mm (5-31/32 inches x 10-17/32 inches x 14-23/32 inches) (excluding protrusions)

Camera Unit	
Pickup Device	11.14 million pixels, MOS Sensor
Optical Filter	ND: Clear, 1/4, 1/16, 1/64
Lens Mount	2/3-type bayonet
Sensitivity	Two shooting modes [HIGH SENS]: F10 (59.94 Hz)/F11 (50 Hz) [NORMAL]: F6 (59.94 Hz)/F7 (50 Hz) 2000 lx, 3200 K, when white reflectivity is 89.9%
Horizontal Modulation	50% or above (27.5 MHz)
S/N	62 dB or above
Horizontal Resolution	HD: 1000 TV lines or above (center) 4K: 2000 TV lines or above (center, AK-UCU600PJ/UCU600PSJ/UCU600EJ/UCU600ESJ output)
Gain Switching	[NORMAL]: -6, -3, 0, 3, 6, 9, 12, 15, 18, 21, 24, 27, 30, 33, 36 [HIGH SENS]: -6, -3, 0, 3, 6, 9, 12, 15, 18, 21, 24, 27, 30, 33, 36
Shutter Speed	<ul style="list-style-type: none"> [59.94i]/[59.94p] mode: 1/100, 1/120, 1/125, 1/250, 1/500, 1/1000, 1/1500, 1/2000 [29.97p] mode: 1/48, 1/50, 1/60, 1/96, 1/100, 1/120, 1/125, 1/250, 1/500, 1/1000, 1/1500, 1/2000 [23.98p] mode: 1/48, 1/50, 1/60, 1/96, 1/100, 1/120, 1/125, 1/250, 1/500, 1/1000, 1/1500, 1/2000 [50i]/[50p] mode: 1/60, 1/100, 1/125, 1/250, 1/500, 1/1000, 1/1500, 1/2000 [25p] mode: 1/48, 1/50, 1/60, 1/96, 1/100, 1/125, 1/250, 1/500, 1/1000, 1/1500, 1/2000
System Format	3840 x 2160/59.94p/50p/29.97p/25p/23.98p 1920 x 1080/59.94p/59.94p(2x)/50p/50p(2x)/29.97p/25p/23.98p

Video Input/Output	
<HD SDI 1> terminal	BNC x 1 3G/1.5G-SDI: 0.8 V [p-p], 75 Ω
<HD SDI 2> terminal	BNC x 1 3G/1.5G-SDI: 0.8 V [p-p], 75 Ω
<AUX> terminal	BNC x 1 Functions as <HD TRUNK> terminal/<PROMPTER2> terminal by switching the setting in the menu <HD TRUNK>: 1.5G-SDI: 0.8 V [p-p], 75 Ω <PROMPTER2>: VBS signal 1 V [p-p], 75 Ω
<G/L IN/PROMPTER OUT> terminal	BNC x 1 <G/L IN>: Tri-level SYNC or black burst <PROMPTER OUT>: VBS signal 1 V [p-p], 75 Ω Functions as <G/L IN> when standalone, and as <PROMPTER OUT> when AK-UCU600PJ/UCU600PSJ/UCU600EJ/UCU600ESJ is connected

Audio Input/Output	
<MIC 1> terminal	XLR x 1, 3-pin, female type <LINE>/<MIC>/<+48V> switchable For <MIC>, <FRONT>/<REAR> switchable <LINE>: 0 dBu, +4 dBu menu selection available <MIC>: -60 dBu, -40 dBu, or -20 dBu menu can be selected
<MIC 2> terminal	XLR x 1, 3-pin, female type <LINE>/<MIC>/<+48V> switchable <LINE>: 0 dBu, +4 dBu menu selection available <MIC>: -60 dBu, -40 dBu, or -20 dBu menu can be selected
<MIC> terminal (front)	XLR x 1, 3-pin, female type Switchable with <MIC 1> terminal

Intercom	
<INTERCOM1> terminal	XLR x 1, 5-pin, female type
<INTERCOM2> terminal	XLR x 1, 5-pin, female type
<EARPHONE> terminal	Stereo mini jack x 1

Other Input/Output	
<OPT FIBER> terminal	Optical composite connector x 1
<LENS> terminal	12-pin x 1
<VF> terminal	20-pin x 1
<VF> terminal (rear)	29-pin x 1
<DC IN> terminal	XLR x 1, 4-pin, DC 12 V
<DC OUT 12 V 1 A> terminal	4-pin x 1
<RET CTRL> terminal	6-pin x 1
<EXT I/O> terminal	20-pin x 1, DC 12 V, 0.5 A
<REMOTE> terminal	10-pin x 1
<TRUNK> terminal	12-pin x 1
<DC OUT 12 V 2.5 A> terminal	2-pin x 1
<LAN> terminal	RJ-45 x 1

Camera Control Unit (CCU) AK-UCU600PJ/UCU600EJ/UCU600PSJ/UCU600ESJ

Power Supply	AK-UCU600PJ/AK-UCU600PSJ: 100 V - 120 V AC, 50 Hz/60 Hz AK-UCU600EJ/AK-UCU600ESJ: 100 V - 240 V AC, 50 Hz/60 Hz
Power Consumption	500 W (Without camera connected: 90 W)
Capacity for Supplying Power to a Camera	240 V AC (tolerance: 5%), 1.46 A, 50 Hz/60 Hz
Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
Humidity	10% to 90% (no condensation)
Weight	Approx. 8.9 kg (19.6 lb)
Dimensions (W x H x D)	424 mm x 88 mm x 401 mm (16-5/8 inches x 3-7/16 inches x 15-13/16 inches) (excluding protrusions)
Video Output	3G/HD-SDI: 5 lines (embedded audio is supported only for HD signals) 12G/6G/3G/HD-SDI: 2 lines HD-SDI: 1 line (shared with picture monitor output*) Analog composite: 2 lines (1 line shared with picture monitor output*)
HD TRUNK/TICO Output	HD-SDI: 1 line (HD TRUNK output) 3G/HD-SDI: 1 line (TICO output)
Return Input	3G-HD/HD/SD-SDI: 4 lines (RET1 input has active-through output) (internal FS) Analog composite: 1 line
Prompter Input	HD-SDI: 1 line (with active-through output) (internal FS) Analog composite: 2 lines (through output of 1 and input of 2 share the connector*) It is not terminated when the unit is turned OFF. No through output.
Reference Input	BB (black burst) / tri-level*2: 1 line (automatic termination, connect to upper connector; BB signal and tri-level signal automatically recognized, with loop-through output)
Microphone Output	0 dBm/600 Ω, 2 lines (XLR, 3-pin, male)
Communication	Intercom input/output (ENG / PROD, 0 dBm, 600 Ω (4 W) / 1 V [p-p], 200 Ω (RTS), 4 W / RTS / CLRCOM) : 2 lines*1 PGM input (0 dBm/600 Ω) : 2 lines Tally input (red, green, yellow) : 1 input each
AUX	WFM control 6-bit (open collector output, terminal shared with camera microphone gain setting*) Camera microphone gain setting input 5-bit (photo-coupler input, terminal shared with WFM control*) Down-conversion system setting input 2-bit (photo-coupler input)
TRUNK	RS-422 / RS-232C 2 lines*1
FRONT ROP	RS-422 1 line, 16 V DC output (only one of this and REAR ROP can be selected at one time via the menu or the [ROP FRONT/REAR] selection switch on the front panel)
REAR ROP	RS-422 1 line, 16 V DC output (only one of this and FRONT ROP can be selected at one time via the menu or the [ROP FRONT/REAR] selection switch on the front panel)
MSU	RS-422 1 line, GPI for control
LAN TRUNK	LAN connection with camera side via an optical cable*3 1 line, 100BASE-TX, 1000BASE-T
LAN	Personal computer connection for distribution via the Web*3 1 line, 10BASE-T, 100BASE-TX (use a crossover cable when connecting directly with a personal computer)

Remote Operation Panel (ROP) AK-HRP1000GJ/HRP1015GJ/HRP250GJ

Power Supply	12 V DC (Power supply from camera: 10 V - 16 V DC) 42 V - 57 V DC (PoE power supply)
Power Consumption	AK-HRP1000GJ/HRP250GJ: 0.51 A (Power supply from camera: 10 V - 16 V DC) 0.15 A (PoE power supply) AK-HRP1015GJ: 0.44 A (Power supply from camera: 10 V - 16 V DC) 0.11 A (PoE power supply)
Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
Humidity	90% or less
Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Weight	AK-HRP1000GJ: Approx. 1.7 kg (3.75 lb) AK-HRP1015GJ: Approx. 1.5 kg (3.3 lb) AK-HRP250GJ: Approx. 1.4 kg (3.08 lb)
Dimensions (W x H x D)	AK-HRP1000GJ: 102 mm x 385 mm x 113 mm (4 inches x 15-3/16 inches x 4-7/16 inches) AK-HRP1015GJ: 82 mm x 355 mm x 124.4 mm (3-1/4 inches x 14 inches x 4-7/8 inches) AK-HRP250GJ: 92 mm x 308 mm x 67 mm (3-5/8 inches x 12-1/8 inches x 2-5/8 inches)
Camera/CCU Control	Control signals (camera, CCU control) Power supply 16 V DC (when CCU connected)*4, 12 V DC (when camera connected)*4
Maximum Cable Length	When camera connected: 20 m (65.7 ft) When CCU connected: 50 m (164 ft)

Master Setup Unit (MSU) AK-MSU1000GJ

Power Supply	12 V DC (DC input range: 10 V - 16 V DC) 42 V - 57 V DC (PoE+ power supply)
Power Consumption	1.6 A (Power supply: 12 V DC) 0.6 A (PoE+ power supply)
Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
Humidity	90% or less
Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Weight	Approx. 4.0 kg (8.82 lb)
Dimensions (W x H x D)	482 mm x 222 mm x 81.5 mm (18-31/32 inches x 8-3/4 inches x 3-7/32 inches) (including mounting brackets and dial heights)
Adjustment Functions	Scene file, ND filter, CC filter, Color temperature (COLOR TEMP), Master gain (MASTER GAIN), Shutter (SHUTTER), Master pedestal (MPED), Iris (IRIS), Camera selection
CCU Control	RS422 or IP
Maximum Cable Length	When CCU is connected: 50 m (164 ft)

Rear View

AK-HRP1000GJ



AK-HRP1015GJ/HRP250GJ



AK-MSU1000GJ

**22.9 cm (9 inches) LCD Color Viewfinder AK-HVF100GJ**

Power Supply	DC 12 V (supplied from camera or XLR)
Power Consumption	18 W
Operating Temperature	0 °C to 45 °C (32 °F to 113 °F)
Operating Humidity	10% to 85% (no condensation)
Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Weight	Approx. 2.6 kg (5.73 lbs.) (not including hood) / Approx. 3.0 kg (6.61 lbs.) (including hood)
Dimensions (W x H x D)	340 mm x 234 mm x 193 mm (13-13/32 inches x 9-7/32 inches x 7-5/8 inches) (not including hood) 340 mm x 234 mm x 231 mm (13-13/32 inches x 9-7/32 inches x 9-1/8 inches) (including hood)
Display Panel	22.9 cm (9.0 inches)
Number of Pixels	1920 x 1080 (FHD)
Display Color	Approx. 16.77 million colors
Operation	<POWER> switch, <MENU> button, <SELECT> dial button, <F1>/<F2>/<F3>/<F4> buttons, <BRIGHT> knob, <CONTRAST> knob, <PEAKING> knob, <INPUT> switch
Connector	Camera I/F connector (D-sub 29 pins x 1) SDI IN connector (BNC x 1) DC IN connector (XLR 4 pins x 1)
Supported Signal Format	CAM: 1080/59.94i, 1080/50i SDI: 1080/59.94p, 1080/50p, 1080/59.94i, 1080/50i, 720/59.94p, 720/50p

*1: Depending on the setting, only one of them can be selected at one time.

*2: The BB (black burst) signal and tri-level sync signal of the reference input are recognized automatically.

*3: IP video cannot be transmitted when [CCU MODE] is set to [2160/23.98p], [2160/23.98PsF], [1080/23.98p], or [1080/23.98PsF].

*4: Can be provided from CCU




Dimensions

As of October, 2020


Unit: mm(inches)

■ AK-UC3300GJ/3300GSJ

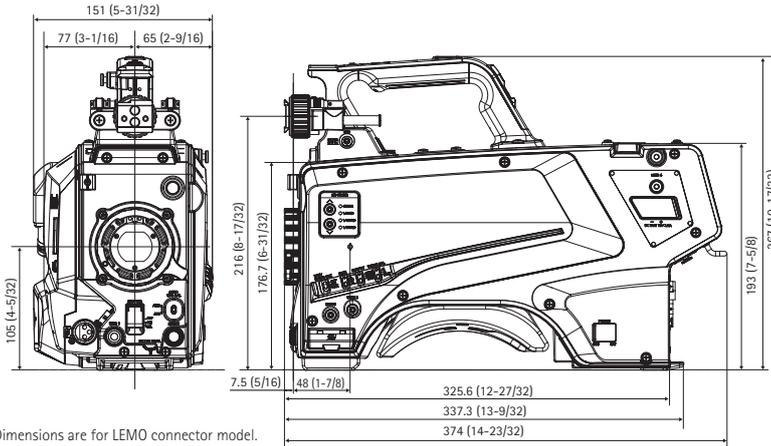


* Dimensions are for LEMO connector model.

■ AK-UCU600P/UCU600EJ/UCU600PSJ/UCU600ESJ

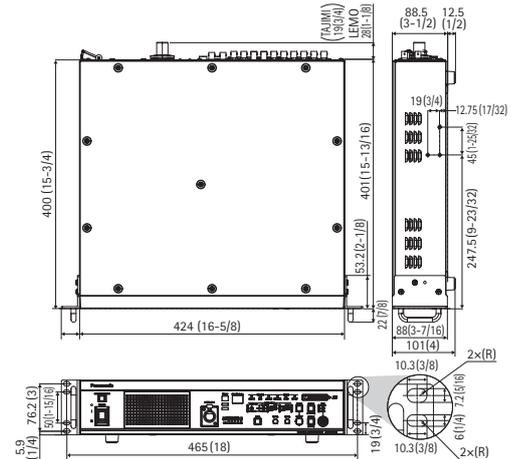


* Dimensions are for LEMO connector model.


■ AK-HRP1000GJ

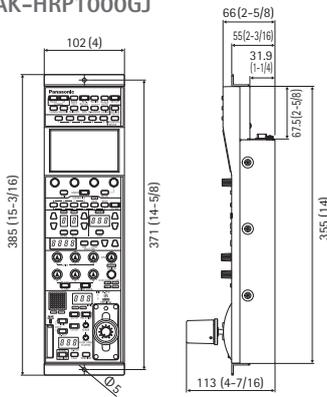


■ AK-HRP1015GJ

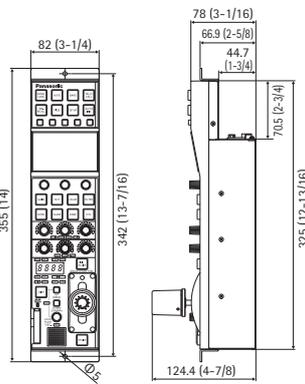


■ AK-HRP250GJ

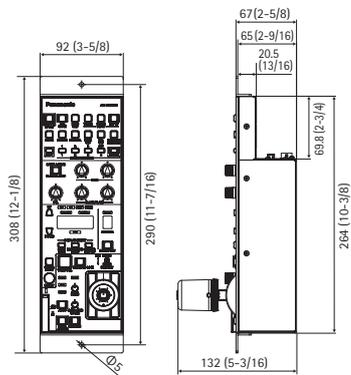

■ AK-MSU1000GJ

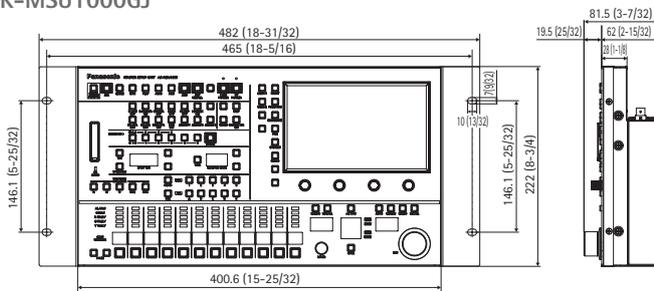

■ AK-HVF100GJ

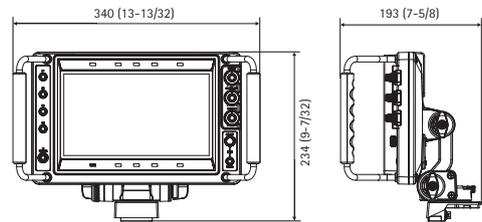

* Specifications are subject to change without notice.

Panasonic®

Panasonic Corporation
Connected Solutions Company
2-15 Matsuba-cho, Kadoma, Osaka 571-8503 Japan



For more information, please visit Panasonic web site
<https://pro-av.panasonic.net/en/qr/>



Factories of AVC Networks Company have received ISO14001:2004-the Environmental Management System certification. (Except for 3rd party's peripherals.)



Broadcast and Professional AV Website



Contact Information



Facebook



Mobile App