


OpenGear Converter UpDownCross

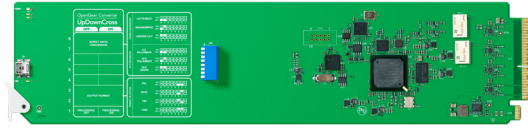

Lässt Sie hochqualitative Aufwärts-, Abwärts- und Crosskonvertierungen zwischen mehreren SD- und HD-Videostandards ausführen. Der OpenGear Converter UpDownCross hat sogar einen Formatwandler an Bord und kann bei der Videobearbeitung passend für akkurate AV-Synchronisierung die SDI-Audioverzögerung angleichen.

549 €*

Anschlüsse

SDI Video Input

Switchable between SD, HD and 3 Gb/s SDI.

SDI Video Output

7 x outputs automatically match the SD, HD and 3 Gb/s SDI video input unless up, down, cross and/or standards conversion is enabled. 1 x SDI loop output.

Reference Input

Blackburst and TriSync for SD & HD.

Multi Rate Support

Auto detection of SD, HD and Level B 3 Gb/s SDI inputs.

Updates and Configuration

Via USB 2.0 high speed. (480 Mb/s)

Reclocking

Yes



Normen

SDI Compliance

SMPTE 292M, SMPTE 259M, SMPTE 296M, ITU-R BT.656 and ITU-R BT.601.

SDI Video Rates

SDI video connections are switchable between standard definition and high definition.

SDI Video Sampling

4:2:2

SDI Audio Sampling

Television standard sample rate of 48 kHz and 24-bit.

SDI Color Precision

4:2:2

SDI Color Space

YUV

SDI Auto Switching

Automatically selects between SD, HD and 3 Gb/s SDI.

SDI Format Support

625/25 PAL, 525/29.97 NTSC, 720p50, 720p59.94, 720p60. 1080PsF23.98, 1080PsF24, 1080PsF25, 1080i50, 1080i59.94, 1080i60, 1080p50, 1080p59.94, 1080p60, 2048 x 1080p23.98, 2048 x 1080p24, 2048 x 1080p25, 2048 x 1080PsF23.98, 2048 x 1080PsF24, 2048 x 1080PsF25, 2048 x 1556PsF23.98, 2048 x 1556PsF24, 2048 x 1556PsF25

Format Conversion

Up, down, cross conversion and/or NTSC/PAL standards conversion.

Software

Software Control

Mac OS X™ and Windows™ software upgrade via USB.

Internal Software Upgrade

Via included updater application.

Betriebssysteme



Mac OS X 10.10 Yosemite, Mac OS X 10.11 El Capitan oder höher.




Windows 8.1 oder Windows 10.

Settings Control

OpenGear DashBoard network control software, Mini Switches or USB software.

Physische Spezifikationen

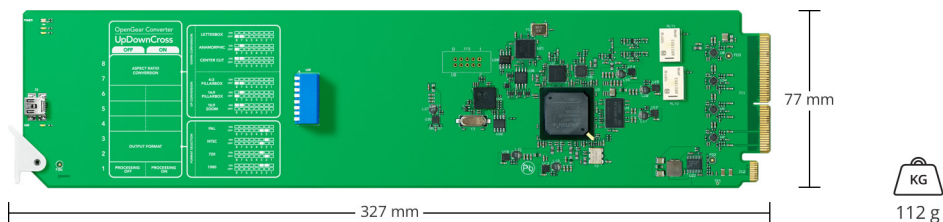

Umgebungs- bedingungen

Operating Temperature
0° to 40° C (32° to 104° F)

Storage Temperature
-20° to 45° C (-4° to 113° F)

Relative Humidity
0% to 90% non-condensing

Was ist im Lieferumfang enthalten

OpenGear Converter UpDownCross

Garantie

3 Year Limited Manufacturer's Warranty.

Für alle Elemente auf dieser Website gilt das Copyright von Blackmagic Design Pty. Ltd. 2016;
Alle Rechte vorbehalten. Alle Handelsmarken sind Eigentum ihrer jeweiligen rechtmäßigen Besitzer.
*Unverbindliche Preisempfehlung inkl. MwSt zuzüglich Versand- und Zustellungskosten.

Zugelassene Blackmagic Design Reseller