

Mini Converter Sync Generator



Includes 6 crystal stabilized video reference outputs for referencing all the video equipment in your studio in either high definition Tri-Sync or standard definition Blackburst television standards. Perfect for small studios and outside broadcasts!

\$195

Connections

Analog Video


6 x common reference outputs.

Multi Rate Support

Via mini switches

Updates and Configuration

USB

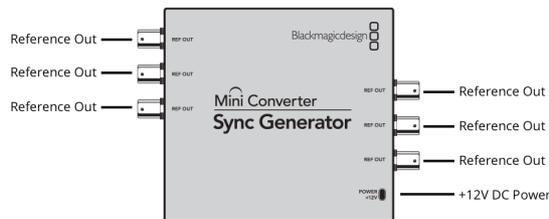

Standards

Analog Format Support

625/25 PAL, 525/29.97 NTSC

720p50, 59.94, 60

1080PsF23.98, 24

1080p23080i50, 59.94, 60

1080p23.98, 24, 25, 29.97, 30

Software

Software Control

Mac OS X™ and Windows™ software upgrade via USB.

Internal Software Upgrade

Via included updater application.

Operating Systems



Mac OS X 10.10 Yosemite,
Mac OS X 10.11 El Capitan
or later.



Windows 8.1 or
Windows 10.

Settings Control

Mini Switches or USB software.

Power Requirements

Power Supply

+12V universal power supply included
with international socket adapters for all
countries. Cable tie point.

Power Consumption

3.00 Watts

Operational Voltage Range

12V DC

Physical Specifications



Environmental Specifications

Operating temperature

0° to 40° C (32° to 104° F)

Storage temperature

-20° to 45° C (-4° to 113° F)

Relative Humidity

0% to 90% non-condensing

What's Included

Mini Converter Sync Generator
Software and manual SD card
12V universal power supply with international socket adapters

Warranty

3 Year Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2016, all rights reserved.
All trademarks are property of their respective owners. MSRP excludes sales taxes/duties and shipping costs.

Blackmagic Design Authorized Reseller