



# MINIATURE & HEADWORN MICROPHONES


FROM DPA MICROPHONES



To learn more about DPA's miniature microphones and find the model that best meets your requirements, please visit [www.dpamicrophones.com](http://www.dpamicrophones.com).

## Contents

DPA 4060, 4061, 4062 & 4063 .....	4
DPA IMK4060 & IMK4061 .....	6
DPA SMK4060 & SMK4061 .....	8
DPA 4071, 4073, EMK & FMK .....	10
DPA 4080 .....	12
DPA 4081 .....	14
DPA 4065, 4066 & 4067 .....	16
DPA 4088 .....	18
DPA BLM4060 .....	20
DPA 4098H .....	22
Adapters .....	24
Accessories .....	29
Specifications .....	34

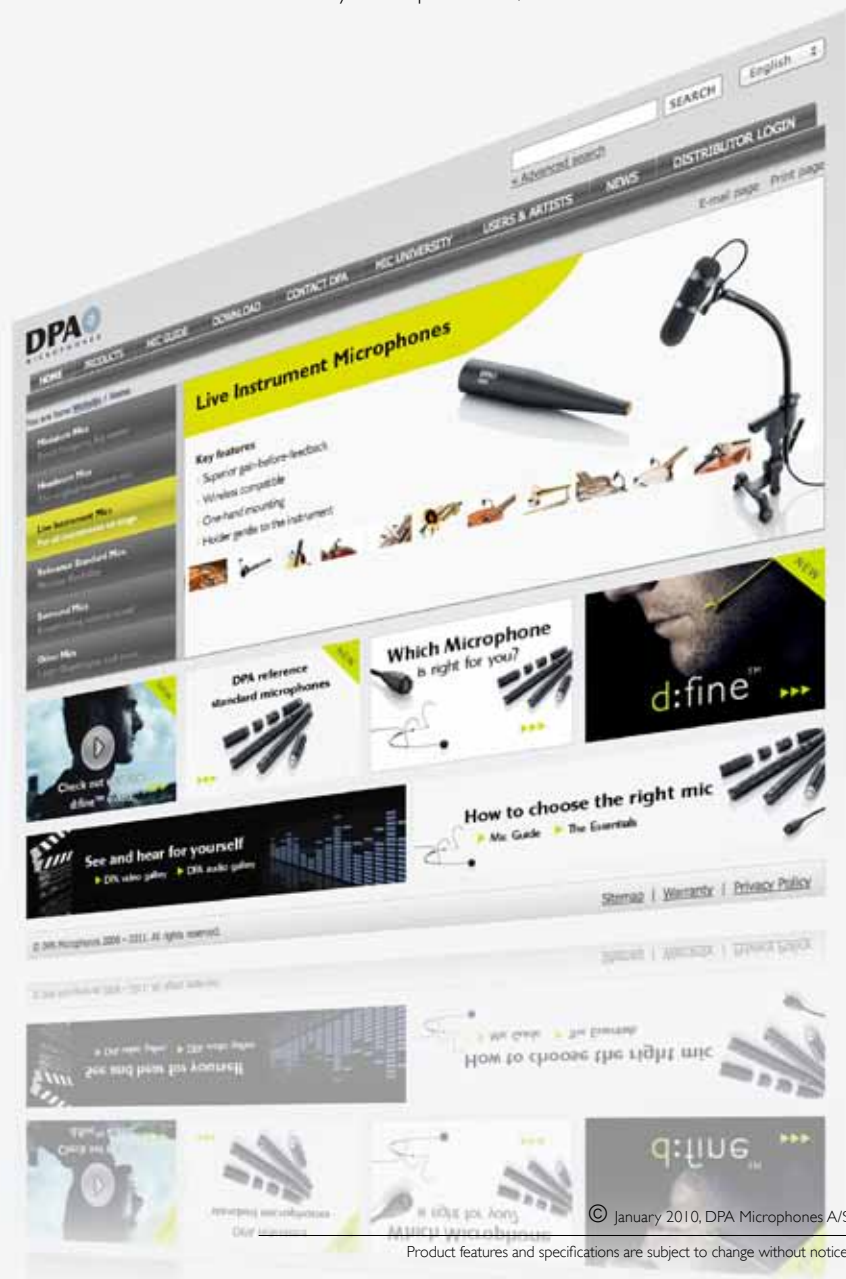

### **Then and now**

Since the launch of its first product in 1992, DPA Microphones has firmly established itself as one of the world's preeminent manufacturers of microphones for studio and location recording, broadcast, theater and live sound. Building upon the respected legacy of Brüel & Kjær, DPA's reputation for capturing an extremely natural and open sound – especially noticeable when recording vocals and traditional acoustic instruments – has provided the brand with unprecedented growth over the past two decades.

### **Universal approach**

The same skillful design and “no compromises” approach to manufacturing that are embodied by DPA Microphones have been extended to our line of miniature condenser microphones, ingenious accessories and tailor-made solutions for a wide variety of demanding applications. Form and function are key aspects of our design philosophy and contribute significantly to the continued success of our products.

### **Headworn or lavalier**

DPA's headworn miniature microphones are the mics of choice in live theater and musical productions, as well as for houses of worship and corporate events. For serious recording and sound reinforcement, DPA meets the challenge with exceptional technical specifications and creative mounting accessories for any musical instrument, while the miniature lavalier microphones designed for concealed use in broadcast and film production demonstrate a previously unheard clarity and speech intelligibility.

Professional microphone solutions for any need



H a n d c r a f t e d   i n   D e n m a r k

## **DPA 4060, 4061, 4062 & 4063 Miniature Omnidirectional Microphones**

### **Small footprint, big sound**

DPA is without equal when it comes to the 4060 range of miniature omnidirectional condenser microphones. Originally designed for use with wireless systems in theater, television and close-miked instrument applications, the highly unobtrusive capsule is visually smaller than a pencil eraser.

### **Same yet different**

The award-winning DPA 4060 has a very low noise floor, impressive sensitivity and can handle high SPLs. The DPA 4061, 4062 and 4063 are acoustically identical to the 4060 but have been adjusted to handle higher SPL and to match some of the more sensitive transmitters on the market. The 4063 also features a FET preamp designed to be used with RF systems delivering as low as 3 V to the microphone.

### **Need a boost?**


Two different protection grids are supplied and by changing these grids you can acoustically modify the microphones response according to their placement on the body. One gives you a 3 dB of boost in the 8 – 20 kHz range, while the other gives you a 10 dB boost at 12 kHz.

### **Get connected**

The miniatures also have another innovative design feature: the MicroDot connector system. The tiny but rugged connector allows you to securely attach a wide variety of available adapters. This useful feature effectively multiplies your mic inventory since you can use the same microphone element on a variety of transmitters and even with XLR inputs. Choose between our adapter system or a hardwired connector.

### **Hear everything, see nothing**

Because of their small size, these miniature mics exhibit an exceedingly accurate omnidirectional pattern and therefore do not need to be aimed directly at the sound source to achieve quality pickup. Offering great detail and resolution, they have a neutral sonic character and are very natural sounding. On stage, the tiny mics are literally undetectable, being both extremely rugged and reliable, even under the most punishing conditions (high heat, humidity, wind, dust, etc.).

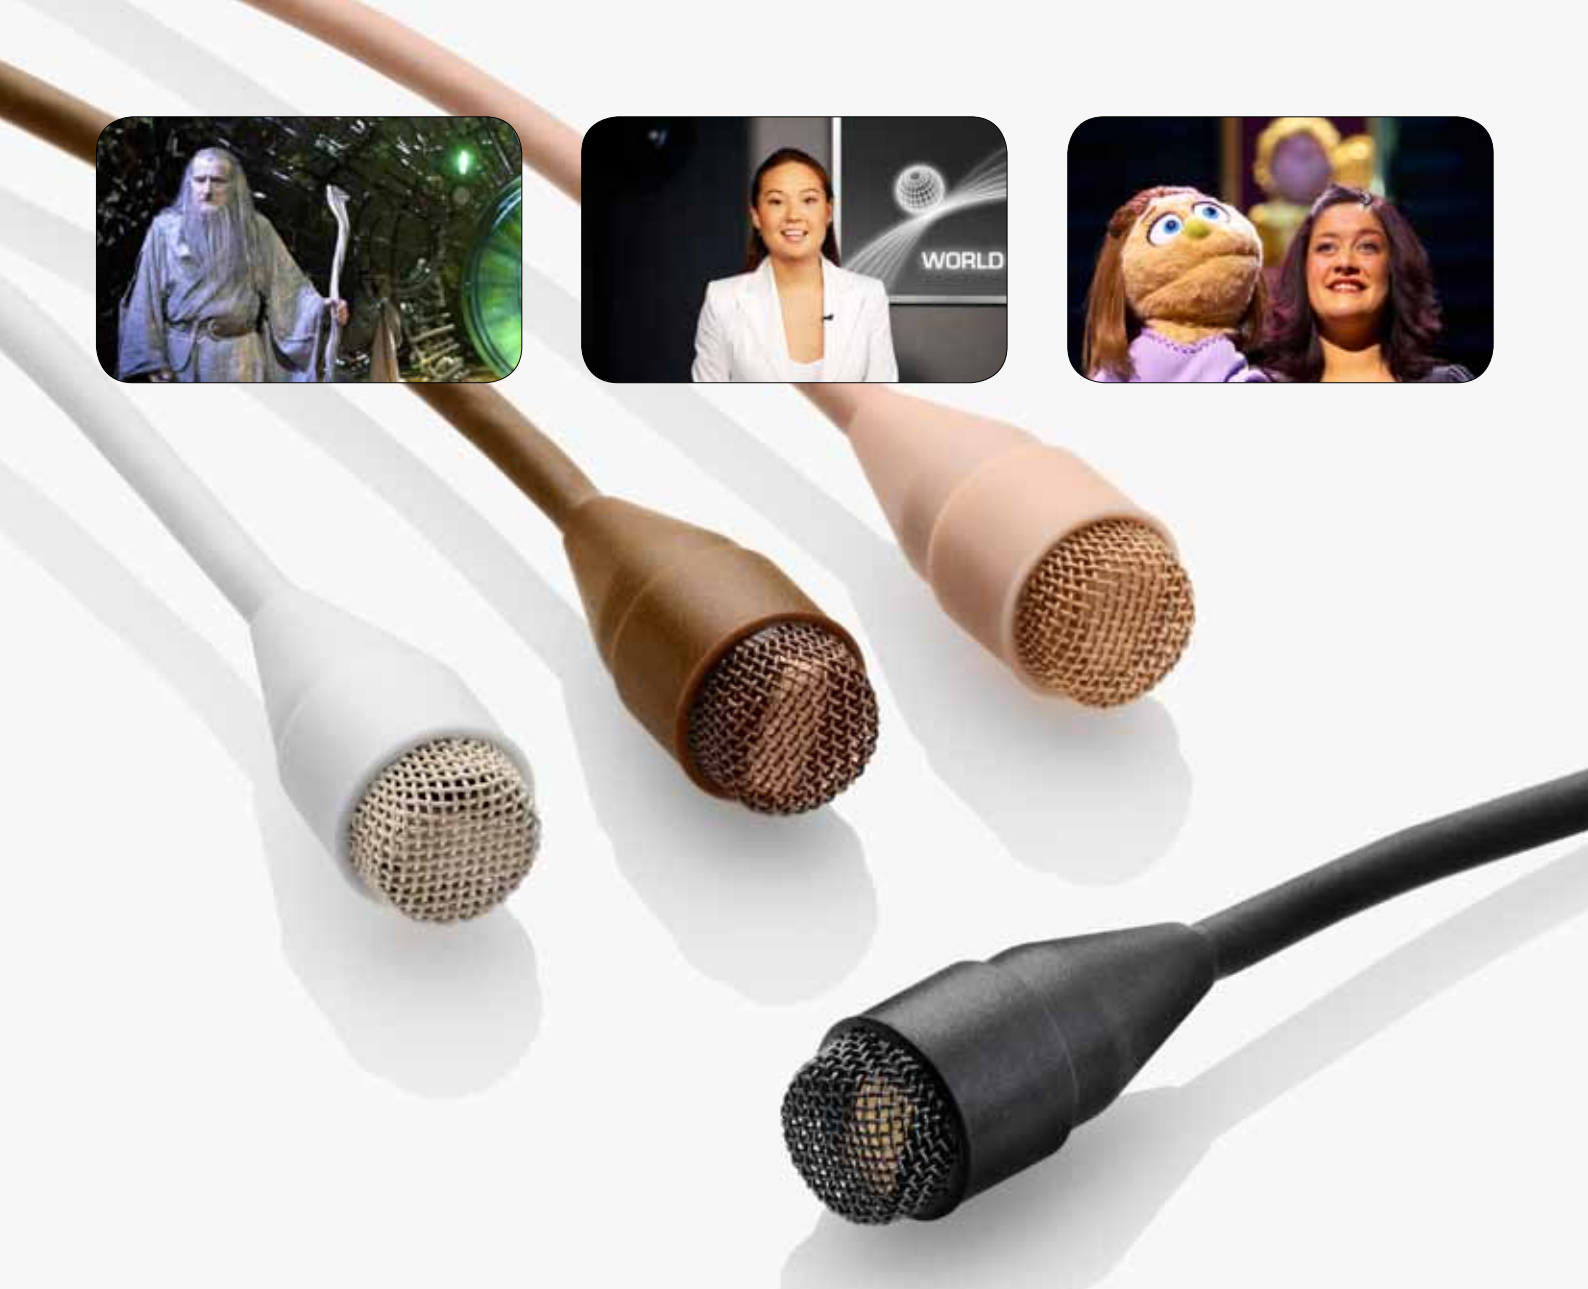

## DPA 4060, 4061, 4062 & 4063 Key Features

- Neutral sound character with great detail
- Large dynamic range
- Low noise and high sensitivity
- Fits numerous transmitters

## DPA IMK4060 & IMK406I Instrument Microphone Kit

### In the zone but out of the way

The 4060 and 406I at the heart of DPA IMK4060 and IMK406I Instrument Microphone Kits represent the perfect combination of sonic purity and versatility. The tiny size and light weight of these mics make them extremely unobtrusive, ensuring that they'll never get in the way of capturing an outstanding performance.

### Handle the pressure

Equipped with a MicroDot to XLR adapter and well chosen accessories designed to aid mounting the microphone on, and even in, a wide range of instruments, these kits offer very clean, detailed and natural sound. Capable of handling a robust 144 dB peak before clipping, the microphones can be used even for snare drums, trumpets, guitar and bass speaker cabinets or other high SPL sources.

#### IMK4060 includes

1 x 4060-BM	Omnidirectional Mic, Black, High-Sens
1 x DAD6001-BC	MicroDot to 3-pin XLR (P48)
1 x DMM0002-B	Double Pin, Black
1 x DMM0007	Universal Surface Mounts, 5 pcs.
1 x DMM0011-B	Magnet Mount, Black
1 x DUA0560	Windscreens, Black, 5 pcs.
2 x MHS6001	Holder for Strings

#### IMK406I includes

1 x 406I-BM	Omnidirectional Mic, Black, Low-Sens
1 x DAD6001-BC	MicroDot to 3-pin XLR (P48)
1 x DMM0002-B	Double Pin, Black
1 x DMM0007	Universal Surface Mounts, 5 pcs.
1 x DMM0011-B	Magnet Mount, Black
1 x DUA0560	Windscreens, Black, 5 pcs.
2 x MHS6001	Holder for Strings





## DPA IMK4060 & IMK406I Key Features

- Clean and transparent sound
- Accessories for mounting on instruments
- Lightweight
- Various close-miking solutions

## DPA SMK4060 & SMK406I Stereo Microphone Kit

### Left and right

The SMK4060 and SMK406I Stereo Microphone Kits are cost-effective and flexible live sound and recording solutions ideal for recording studios and discreet mic setups on stage. The SMK4060 features two DPA 4060 high-sensitivity omnidirectional miniature microphones while the SMK406I combines two low-sensitivity DPA 406I mics.

### Ready for anything

Offering clean, transparent sound with plenty of headroom, each kit is supplied with two MicroDot to XLR adapters and includes distinctive accessories for mounting the microphones on a wide variety of surfaces, including music stands, instruments, walls, stage floors and piano lids.

#### SMK4060 includes

2 × 4060-BM	Omnidirectional Mic, Black, High-Sens
2 × BLM6000-B	Boundary Layer Mount, Black
2 × DAD6001-BC	MicroDot to 3-pin XLR (P48)
1 × DMM0007	Universal Surface Mounts
2 × DMM001I-B	Magnet Mount, Black
1 × DUA0560	Windscreens, Black
2 × MHS600I	Microphone Holder for Strings

#### SMK406I includes

2 × 406I-BM	Omnidirectional Mic, Black, Low-Sens
2 × BLM6000-B	Boundary Layer Mount, Black
2 × DAD6001-BC	MicroDot to 3-pin XLR (P48)
1 × DMM0007	Universal Surface Mounts
2 × DMM001I-B	Magnet Mount, Black
1 × DUA0560	Windscreens, Black
2 × MHS600I	Microphone Holder for Strings





## DPA SMK4060 & SMK406I Key Features

- Natural and dynamic reproduction
- Discreet solution
- Boundary layer mounting possible
- Close-miking stereo pair solutions

## DPA 407I, EMK & FMK Miniature Omnidirectional Microphone with Presence Boost

### Television and movie stars

The DPA 407I is an omnidirectional miniature condenser microphone designed for television broadcast and film applications. Its frequency response is customized for maximum vocal clarity in body-worn and concealed applications, with a low-end roll off and presence boost, making this an ideal sounding microphone to use in the field or on the set.

### Boost and cut

To achieve optimal speech intelligibility, the inconspicuous 407I features a specially designed fixed microphone grid that provides a soft presence boost of 5 dB at 4 – 6 kHz, for maximum clarity and definition. Furthermore, the low-cut filter is done acoustically at the capsule allowing for greater headroom in the signal path.

### DPA 407I Kits

When it is imperative that the microphone be invisible for film or TV production, the FMK407I Film Microphone Kit pairs the 407I with a miniature concealer, tie pods, various pre-cut tape pieces, as well as a windjammer and miniature mesh filter to avoid pops and wind noise.

### In the field, on the air

When the microphone may be visible, such as in ENG and EFP applications, the EMK407I ENG/EFP Microphone Kit comes supplied with a variety of pins, clips and holders, a mix of multi-colored windscreens, and both a windjammer and miniature mesh filter. For even greater clarity of speech, the kit includes an XLR adapter that provides 3 dB of attenuation at 800 Hz as a final tonal adjustment for going directly on-air or to track without editing.

#### EMK407I includes

407I-BM	Omnidirectional Mic with Presence Boost, Black
DAD6024	XLR Adapter with Mid Range Attenuation
DMM0002-B	Double Pin, Black
DMM0005	Holder, Single Pin
DMM0008-B	Clip, Double Lock, Black
DUA0570	Windscreens, Color Mix, 8 pcs
DUA0571	Windjammer, Grey Fur
DUA0572	Mesh

This kit is also available without microphone and adapter as DAK407I-E.

#### FMK407I includes

407I-BM	Omnidirectional Mic with Presence Boost, Black
ADH0001	Double-sided tape for Tie Pod, 10 pcs.
ADH0003	Mic Tape, 10 pcs.
ADH0004	Double-sided Mic Tape
ADH0002	Double-sided tape for Concealer, 10 pcs.
DMM0009	Concealer
DMM0010	Tie Pod, 3 pcs.
DUA0571	Windjammer, Grey Fur
DUA0572	Mesh

This kit is also available without microphone as DAK407I-F.



## DPA 407I, FMK407I & EMK407I Key Features

- Customized for chest mounting
- Optimal speech intelligibility
- Mounting accessories for concealing
- Straight to broadcast without editing

## **DPA 4080 Miniature Cardioid Microphone, Lavalier**

### **Clarity unquestioned, discretion assured**

The DPA 4080 Miniature Cardioid Microphone, Lavalier combines optimum speech intelligibility with a discreet, compact design to create a high-performance lavalier microphone for broadcast, conference and other live performance applications.

### **Good things come in small packages**

Small and discreet, the 4080 sets a new standard for great sound in a sleek design. Sound professionals will appreciate the light weight and the excellent speech reproduction. Because of the flexible and practical mounting solution, the DPA lavalier microphone can easily be turned in all directions and can be worn on either the right or left lapel. The 4080 is delivered with both black and white pop filter.

### **Highly compatible**

A broad range of optional connection adapters is offered for most professional transmitters so that news anchors and conference speakers are free to use their hands and move around without compromising voice quality.

### **Built to last**

The 4080 is supplied with a pre-mounted pop-filter in a durable holder with an integrated shock mount, attached to the DP A clip. All parts of the microphones are manufactured from highly resistant materials and are designed to perform under stress.

### **Natural performer**

The frequency response of the DPA 4080 lavalier is tailored to body-worn applications. Acoustically pre-equalized with a 4 dB presence boost, the 4080 captures the human voice with an unusually high degree of definition, even when the acoustic environment is less than favorable.



## DPA 4080 Key Features

- Excellent speech reproduction
- Rejects background noise
- Wear on either right or left lapel
- Fits numerous transmitters

## 408I Supercardioid Miniature Microphone

IMK408I Instrument Microphone Kit with 408I

SMK408I Stereo Microphone Kit with 408I

The DPA 408I Supercardioid Miniature Microphone is a high quality directional condenser microphone primarily intended to use for ultra-low profile, discreet recordings in the field or as all-round microphone for instrument miking. Each 408I is a complete, integrated system combining microphone, windscreen, shock mount and cable management system.

The IMK408I Instrument Microphone Kit offers the possibility to mount a supercardioid condenser microphone close to or at an instrument with either the enclosed clip or magnet. The 408I combines high isolation on stage with natural sound imaging.

The SMK408I Stereo Microphone Kit combines two selected DPA 408I directional microphones providing a cost-effective and flexible stereo recording solution. To create an optimized stereo pair, the microphones are selected to have identical sensitivity within  $\pm 1$  dB at 1 kHz. There are two mounting options included; clip-on and magnet mounts with each being easily interchangeable depending on your optimal setup and situation.

### **IMK408I includes**

1 x 408I	Supercardioid Miniature Microphone
1 x DAD4099	Adapter
1 x DMM0016	Magnet Mount

### **SMK408I includes**

2 x 408I	Supercardioid Miniature Microphone
2 x DAD4099	Adapter
2 x DMM0016	Magnet Mount





### **DPA 408I Key Features**

- Ultra-low profile field recording
- All-round instrument miking
- Wireless compatible
- High isolation on stage



## **DPA 4065, 4066 & 4067 Omnidirectional Headbands**

### **Double header**

The DPA 4065 and 4066 omnidirectional headband mics use the same tiny microphone element and are acoustically and electrically identical to the popular 4061. Despite their diminutive size, both headsets can handle up to 144 dB SPL before clipping.

### **For one...**

Designed for everyday use on the same performer, the 4065 headband mic offers maximum performance for stage, broadcast and home studio applications. The headband is exceptionally lightweight and easily formed to the individual shape of each performer's head, providing a firm yet comfortable fit.

### **...and for all**

With its highly robust construction and option for left or right mounting, the 4066 headband mic is particularly well-suited for environments where there is a different user every day. Especially popular with theaters on Broadway and West End, the system is designed for actors, public speakers, broadcast hosts, musicians and singers. Quickly and easily adjusted, the 4066 is an extremely lightweight and versatile tool.

### **Low voltage**

The DPA 4067 is a low DC and extra low sensitivity version of the 4066, which it is acoustically identical to. Also, the built-in FET preamp is designed for working with RF systems that supply as low as 3 V to the microphone. The 4067 furthermore features an acoustical 6 dB/octave low cut (-3 dB at 40 Hz).

### **Moisture-proof design**

DPA's headband mics are all equipped with a double vent protection system, sweat stopper on the tube and water resistant materials inside the capsule, which allow the microphones to operate reliably even in high-humidity applications.

### **Well connected**

All miniature mic cables are terminated with DPA's innovative MicroDot connector, which permits connection with most of the professional transmitters on the market via one of DPA's numerous adapter accessories. Special adapters have even been developed for compatibility with systems supplying less than 5 V to the mic.

### **Blending in**

All three of DPA's headband microphones are available in a choice of colors and sizes, and supplied with multiple windscreens. The 4066 and 4067 are each also accompanied by both one high boost and one soft boost miniature grid.



### **DPA 4065, 4066 & 4067 Key Features**

- The standard headband mic for theaters and broadcasters
- Resistant to sweat and wear
- Easy to adjust
- Natural sound capture

## **DPA 4088 Cardioid Headband**

### **Superior gain-before-feedback**

The DPA 4088 is a miniature cardioid headband designed for acoustically demanding live performance environments. In high SPL events and when feedback is a concern, the 4088 will tackle these challenges with ease.

### **Perfectly natural**

With its extremely open, clear and natural sound, the 4088 rarely requires any equalization. You hear the voice – pure and simple – not the microphone. Sound quality, visual elegance and true versatility work together to transform every show into the performance of a lifetime.

### **Bass in its place**

The side address capsule is hidden in a small and ultra-lightweight housing. The bass response is designed for optimal linearity at 2 – 3 centimeters (about 1 inch) from the sound source. This means that the bass roll-off will be more prominent at a greater distance – an important factor when it comes to rejection of background noise and the fight to avoid feedback.

### **Rugged build**

The mechanical design is based on the proven construction quality of the 4066 headband microphone. The headband mount is exactly the same; however, the boom is 3 centimeters longer to match the need for placement at the corner of the mouth.

It is available in three colors: beige, brown, and black, and in three different sizes to fit any head size.



## DPA 4088 Key Features

- Fits any head size and shape
- Optimizes gain before feedback
- Integrated pop protection
- High sound pressure level handling

## **DPA BLM4060 Boundary Layer Microphone**

### **No boundaries**

With its elegant design and excellent performance, the BLM4060 Boundary Layer Microphone is the perfect solution for capturing clear, natural speech and vocal sound reinforcement in boardrooms, courtrooms, classrooms and conference facilities. The BLM4060 is a transducer designed to work under optimum conditions when placed on hard, flat surfaces that reflect sound. Featuring a built-in DPA 4060 miniature microphone with an omnidirectional polar pattern, the BLM4060 benefits from the available wide range of connection adapters and power supplies that make it possible to be used with essentially any microphone input.

The microphone element is designed for maximum speech intelligibility and the microphone body consists of a center rubber disc that holds the microphone element mounted in an elegant stainless steel base. The BLM4060 can be easily placed in essentially any position on the surface, even close to the edge. Users will benefit from the special characteristics of the surrounding sound field on which the BLM4060 is mounted: a 6 dB gain of direct sound and only 3 dB gain of the diffuse sound.



## DPA BLM4060 Key Features

- Excellent speech pickup
- Easily placed on all surfaces
- Stylish and elegant design
- Ideal choice for conference rooms

## **4098H Hanging Supercardioid Microphone**

Leading condenser microphone designer and manufacturer, Danish DPA Microphones, continues the heritage of sonic excellence with the 4098H Hanging Supercardioid Microphone. Designed to be suspended in environments like churches, performing arts centers, orchestra pits, theaters and TV studios, the 4098H delivers sparkling clear and distinct natural sound for both recording and sound reinforcement of choirs, instrumental or vocal groups, speech or live audiences.

This new microphone represents a breakthrough in discreet, elegant and lightweight design. Extremely low in profile, the integrated gooseneck provides the ability to easily aim the mics, ensuring perfect positioning with minimal visual impact since the optional extension cables are very slim and nearly invisible.

These microphones live up to their pedigree with sound as accurate as DPA's other world-class microphones with clear and natural reproduction, flat response and uniform off-axis rejection combined with excellent gain-before-feedback characteristics for live applications. The 4098H has extremely high rejection of RF interference post the signal balanced XLR connector which offers more than 60 dB common mode rejection.

With its easy to hang and aim design along with its extremely natural sound, the 4098H is truly a hanging microphone without equal.





### **DPA 4098H Key Features**

- Low noise, wide dynamic range
- Excellent gain-before-feedback
- Can be suspended or mounted in microphone stand
- Minimal visual impact, non-reflective surface

## Adapters

### Limitless connectivity

Have a specific wireless transmitter and bodypack that you prefer to use? No problem. Thanks to the innovative MicroDot connector design and nearly 40 available adapter accessories, DPA's miniature line of microphones can be used with practically every popular wireless system on the market.

### Expand your arsenal

The versatile MicroDot solution effectively multiplies your microphone inventory. Using a DPA adapter you can use the same miniature microphone on nearly any professional wireless system available, plus on cable.

### We play nice with everyone

DPA has specific adapters for AKG, Audio Ltd., Audio-Technica, Beyerdynamic, Electro-Voice, Lectrosonics, Micron, Mipro, Pastega, Telex ProStar, Ramsa, Samson, Sennheiser, Shure, Sony, Toa, Vega and other systems. Each adapter is guaranteed to perfectly mate to your system of choice.

### Optimized XLR adapters

There are also a few varieties of MicroDot to 3-pin XLR adapters, such as the DAD6024, which provides a 3 dB attenuation at 800 Hz for added clarity when a miniature microphone is chest-worn. This electronic modification prevents the loss of presence, intelligibility and definition, as well as minimizes the need for equalization and additional tweaking.



**Adapters** - Using original DPA adapters, our miniature microphones are currently compatible with the professional transmitters listed below. The model number is typically found on the transmitter. \* It is possible to order selected miniature microphone types with fixed connectors, see [www.dpamicrophones.com/connectors](http://www.dpamicrophones.com/connectors)

<b>Brand / Transmitter</b>	<b>Adapter</b>	<b>Brand / Transmitter</b>	
AKG PT 40	DAD3052	Sabine SW70-T	DAD3053
AKG PT 60	DAD6017*	Samson CT-2	DAD6009
AKG PT 80	DAD6017*	Samson TX-3	DAD6009
AKG PT 81	DAD6017*	Samson UT1L	DAD6017*
AKG PT 400	DAD6017*	Samson UT4	DAD6009
AKG PT 450	DAD6017*	Samson UT5	DAD6009
AKG PT 4000	DAD6017*	Samson UT6	DAD6009
AKG PT 4500	DAD6017*	Samson VT2L	DAD6017*
AKG DPT700	DAD6017*	Sennheiser BF1053-U	DAD6002
AKG DPT70	DAD6017*	Sennheiser BF1083-U	DAD6002
AKG PT45	DAD6017*	Sennheiser Evolution / G2 Series	DAD6034*
AKG PT470	DAD6017*	Sennheiser SK 50	DAD6003*
Audio Ltd. Tx 2000	DAD6004*	Sennheiser SK 250	DAD6003*
Audio Ltd. Tx 2020	DAD6004*	Sennheiser SK 3063	DAD6003*
Audio Ltd. Tx 2040	DAD6004*	Sennheiser SK 5012	DAD6003*
Audio Ltd. MiniTX	DAD6035	Sennheiser SK 2000	DAD6003*
Audio-Technica ATW-T51 (1400 ser.)	DAD6022	Shure PGX1	DAD6010*
Audio-Technica ATW-T75 (7000 ser.)	DAD6028	Shure SC1	DAD6010*
Audio-Technica ATW-T101 (U100)	DAD6021	Shure SLX1	DAD6010*
Audio-Technica ATW-T210	DAD6028	Shure U1	DAD6010*
Audio-Technica ATW-T310	DAD6033	Shure U1L	DAD6011
Audio-Technica ATW-T701	DAD6033	Shure ULX1	DAD6010*
Audio-Technica AEW-T1000	DAD6033	Shure URI	DAD6010*
Audio-Technica ATW-T1000 D	DAD6033	Shure UR1M Lemo3	DAD6003*
Beyerdynamic TS42	DAD6006	Shure UT1	DAD6010*
Beyerdynamic TS85	DAD6006	Sony DWT-B01 Digital Wireless	DAD3058
Beyerdynamic TS190	DAD6006	Sony Freedom WRT 805	DAD6019*
Beyerdynamic TS500 (Non OPUS)	DAD6026	Sony WRT8	DAD6008*
Beyerdynamic TS600 (Non OPUS)	DAD6026	Sony WRT820	DAD6008*
Beyerdynamic OPUS 100-200	DAD6027	Sony WRT860	DAD6008*
Beyerdynamic OPUS 300	DAD6032	TELEX	DAD6030
Beyerdynamic OPUS 500	DAD6032	Telex ProStar UHF UB12	DAD6020
Beyerdynamic OPUS 600	DAD6032	TOA WM360	DAD3050
Beyerdynamic OPUS 800	DAD6032	TOA WM4300	DAD6010*
Beyerdynamic OPUS 900	DAD6032	TOA WM4310	DAD3050
Electro-Voice CSB-1000 (RE1/RE2)	DAD6030	Trantec S5.5 (UHF)	DAD6036
Lectrosonics M185	DAD6012*	Trantec S5000 Series	DAD6026
Lectrosonics UHF (low level)	DAD6021*	Trantec SD7000 Digital Wireless	DAD6003*
Lectrosonics LM, SM and UM series	DAD3056*	Vega T-37	DAD6015
Line 6 XD-V70L	DAD6010	Vega T-66	DAD6011
Micron TX501.x	DAD6013	Vega T-677	DAD6011
Micron TX502.x	DAD6013	Vega U2020	DAD6015
Micron Explorer Series / TX700	DAD6025	Wiscom MTP30	DAD6003*
Mipro ACT-707T	DAD6032	Wiscom TMA16	DAD6018
Mipro ACT-707TE	DAD6032	Wiscom TMU20	DAD6018
Mipro ACT-707TM	DAD6032	X2 Digital Wireless Systems	DAD6034
Mipro ACT-707TS	DAD6032	XLR adapter with belt clip	DAD6001-BC
Mipro ACT-MT103	DAD6032	XLR adapter with midrange attenuator	DAD6024
Mipro ACT-MT303	DAD6032	XLR adapter with belt clip and low cut	DAD4099
Mipro ACT-MT801	DAD6032	Zaxcom TRX900	DAD3057
Mipro ACT-MT808	DAD6032	Zaxcom TRX900LT	DAD3057
Pastega TMA16	DAD6018		
Pastega TMU20	DAD6018		
Ramsa WX-RP410	DAD3051		

**DAD3050**

TOA WM360/4310  
(for low DC Microphones)  
MicroDot to Mini-jack

**DAD3051**

Ramsa WX-RP410  
(for low DC Microphones)  
MicroDot to 4-pin Hirose

**DAD3052**

AKG PT 40  
(for low DC Microphones)  
MicroDot to TA3F Switchcraft

**DAD3053**

Sabine SW70-T  
(for low DC Microphones)  
MicroDot to TA4F Switchcraft

**DAD3056**

Lectrosonics LM, SM and UM series  
(for low DC microphones)  
MicroDot to TA5F Switchcraft

**DAD3057**

Zaxcom TRX900/TRX900TL Series  
(for low DC microphones)  
MicroDot to Lemo 3-pin

**DAD3058**

Sony DWT-B01  
MicroDot to 4-pin Hirose

**DAD4099**

MicroDot to XLR Connector  
with Belt Clip and Low-Cut Filter

**DAD6001-BC**

MicroDot to 3-pin XLR (P48)  
with belt clip

**DAD6002**

Sennheiser BFI 053-U/BFI 083-U  
MicroDot to Coax Lemo

**DAD6003**

Sennheiser SK 50/SK 250/ SK 2000/ SK 3063/SK 5012,  
Trantec SD7000 Digital Wireless,  
Shure UR1M Lemo3  
MicroDot to 3-pin Lemo

**DAD6004**

Audio Ltd. Tx 2000/Tx 2020/ Tx 2040  
MicroDot to 6-pin Lemo

**DAD6006**

Beyerdynamic TS42/TS85/TS190  
MicroDot to 4-pin Binder

**DAD6008**

Sony WRT8/WRT820/WRT860  
MicroDot to 4-pin Hirose

**DAD6009**

Samson CT-2/TX-3/UT4/UT5/UT6  
MicroDot to 6-pin Hirose

**DAD6010**

Line 6 XD-V70L, Shure PGX1/SC1/SLX1/U1/  
ULX1/UR1/UT1, TOA WM4300 MicroDot to  
TA4F Switchcraft

**DAD6011**

Vega T-66/T-677, Shure U1L  
MicroDot to 4-pin Lemo Series S

**DAD6012**

Lectrosonics M185  
MicroDot to TA5F Switchcraft

**DAD6013**

Micron TX501.x/TX502.x  
MicroDot to 8-pin Lemo

**DAD6015**

Vega T-37/U2020  
MicroDot to TA4F Switchcraft

**DAD6017**

AKG PT 60/70/80/81/400/450/470/4000/4500/  
DPT 70/700 Samson UT1L/VT2L MicroDot to  
TA3F Switchcraft

**DAD6018**

Wisycorn/Pastega TMA16/TMU20  
(3 wire preset)  
MicroDot to 3-pin Fischer

**DAD6019**

Sony Freedom WRT805,  
MicroDot to Mini-jack (with thread)

**DAD6020**

Telex ProStar UHF-UB12  
MicroDot to TA4F Switchcraft

**DAD6021**

AT ATW-T101 (U100), Lectrosonics UHF sys-  
tems for low level  
MicroDot to TA5F Switchcraft

**DAD6022**

Audio-Technica ATW-51 (1400 series)  
MicroDot to 4-pin Hirose

**DAD6024**

MicroDot to 3-pin XLR (P48)  
w. Midrange Attenuation  
MicroDot to XLR

**DAD6025**

Micron Explorer Series/TX700  
MicroDot to 6-pin Lemo Series B

**DAD6026**

Beyerdynamic TS 500/600, Trantec S5000  
MicroDot to 4-pin Lemo

**DAD6027**

Beyerdynamic OPUS 100-200  
MicroDot to Mini-jack

**DAD6028**

Audio-Technica ATW-T75 (7000 Series)/  
ATW-T210  
MicroDot to 4-pin Hirose.

**DAD6030**

Electro-Voice CSB-1000 (RE1/RE2), TELEX  
MicroDot to TA4F Switchcraft

**DAD6032**

Beyerdynamic OPUS 300/500/600/800/900,  
Mipro ACT-707T/TE/TM/TS/MT103/303 /801/808  
MicroDot to TA4F Switchcraft

**DAD6033**

Audio-Technica ATW-T310/ATW-T701/  
ATW-T1000D/AEW-T1000/  
MicroDot to 4-pin Hirose

**DAD6034**

Sennheiser Evolution/G2 X2 Digital Wireless  
Systems  
MicroDot to Mini-jack (with thread)

**DAD6035**

Audio Ltd. Mini TX  
MicroDot to 4-pin Lemo  
(short version)

**DAD6036**

Trantec S5.5 (UHF)  
MicroDot to TA4F Switchcraft.

## **Accessories**

### **Something for everyone**

Whether you spend most of your time in the studio, on stage, or in the field, DPA is constantly developing forward-thinking new accessory solutions to best meet your needs.

### **Serious attachment**

Need just the right holder or mount to keep your miniature microphone in place? Simply take your pick from a wide variety of miniature clips, single and double pins, magnet mounts, universal surface mounts, miniature concealers, tie pods, mic holders for strings, double-sided adhesive pads, and more. Find that "sweet spot" and keep your microphone there.

### **Calm the storm**

Five different colors of tiny foam windscreens sufficiently keep plosives under control, while a windjammer and miniature mesh allow engineers to very effectively reduce wind and handling noise.

### **Tiny power stations**

Numerous options exist for powering DPA's range of miniature microphones. The MMA6000 high quality, two-channel microphone amplifier and power supply box for portable stereo recording is equipped with a pair of MicroDot input connectors, 16-position gain control, and low-cut filter. The aluminum tube-shaped MPS6001 can power a single miniature mic via a standard 1.5V AAA battery or work as a 48V Phantom Power adapter. And several varieties of ultra-compact MPS series power supplies can provide more than 300 hours of high-fidelity continuous use from a single 9V battery.

### **Instant modification**

For head-worn applications, DPA offers an anodized steel grid that fits over many of its miniature microphones and introduces a 3 dB soft boost between 8 - 20 kHz. Similarly, another grid is also available that provides a 10 dB soft boost around 12 kHz for chest-worn use. These are both offered in a choice of colors.

### **Options galore**

And there are plenty of other accessories available, including a variety of headbands to fit everyone from small children to towering adults, quality coaxial extension cables in a number of lengths, sweat stoppers, headband clips, and MicroDot tools, among others. There are even various accessory kits for specific applications – such as ENG/EFP and film – that conveniently package the most appropriate tools for the job in a sturdy case with a transparent lid.



**DMM0001**



Miniature Clip

**DMM0002-B/W**



Miniature Double Pin, Black or White

**DMM0003-B/W**



Miniature Magnet, Black or White

**DMM0004-B/W**



Miniature Clip, Small, Black or White

**DMM0005**



Miniature Holder; Single Pin, 3 pcs.

**DMM0007**



Universal Surface Mount, 5 pcs.

**DMM0008-B/W**



Miniature Clip, Double Lock, Black or White

**DMM0009**



Miniature Concealer for 4071

**DMM0010**



Tie Pod, 3 pcs.

**DMM0011-B/W**



Magnet Mount, Black or White

**DMM0012**



Miniature Concealer for 4060

**DMM0014**



Clip for 4080

**DMM0015**



Double Clip for 4080

**DMM0016**



Magnet Mount for 4080

**DMM0017-B/W**



Miniature Mic Holder, Black or White

**DUA0513**



Cable clamp for 4080, 5 pcs.

**MHS6001**

Microphone Holder for Strings

**DUA6001/03/05/17**

Miniature Grids, Soft Boost, Black, Beige, White &amp; Brown, 5 pcs.

**DUA6002/04/06/18**

Miniature Grids, High Boost, Black, Beige, White &amp; Brown, 5 pcs.

**DUA0574/75/76**

Pop Screens for 4088, Black, Beige &amp; Brown

**DUA6019**

Protection Cap for 4060/61/62/63/65/66/67/71/73, 25 pcs.

**DUA0560/61/62/63/64/66/67/68/70**

Windscreens, Black, Red, Blue, Yellow, Green, White, Beige, Brown &amp; Colormix

**DUA0571**

Windjammer for 4071, Grey Fur

**DUA0572**

Miniature Mesh for 4071

**DUA0577**

Windscreen for 4080

**DAK4060**

Accessory Kit for Miniature Microphones

**DAK4071-E**

Accessory Kit for Miniature Microphones - ENG/EFP

**DAK4071-F**

Accessory Kit for Miniature Microphones - Film

**ADH0001**

Double-sided Tape for Tie Pod, 25 pcs.

**ADH0002**

Double-sided Tape for Miniature Microphones Concealer, 25 pcs.

**ADH0003**

Miniature Mic Tape, 25 pcs.

**ADH0004/05**Double-sided Mic Tape, 10 pcs.  
Double-sided Mic Tape, 50 pcs.

**DAO6005**

Miniature Microphone Extension Cable, 3.5 m (11.5 ft)

**DAO6010**

Miniature Microphone Extension Cable, 10 m (32.8 ft)

**DAO6020**

Miniature Microphone Extension Cable, 20 m (65.6 ft)

**DAO6015**

Cable for BLM4060, 3 m (10 ft)

**DAO6016**

Cable for BLM4060, 10 m (32.8 ft)

**DAO6017**

Cable for BLM4060, 20 m (65.6 ft)

**DAO0135**

Stereo Mini-jack Plug, 1 m (3 ft)

**DAO0136**

Stereo Mini-jack Plug - 2 x 1/4 in Mono Jack Plugs, 5 m (16.4 ft)

**DAO0137**

Stereo Mini-jack Plug - 1/4 in Mono Jack Plug, 5 m (16.4 ft)

**DAO0138**

Stereo Mini-jack Plug - 2 x male XLR Plugs, 5 m (16.4 ft)

**DAO0139**

Stereo Mini-jack Plug - Phono L+R Plug, 1 m (3 ft)

**MMA6000**

Miniature Microphone Amplifier

**MPS6001**

Miniature Power Supply, 1-channel, 3-pin XLR

**MPS6010**

Miniature Power Supply, 2-channel, 3-pin XLR

**MPS6020**

Miniature Power Supply, 2-channel, Phono

**MPS6030**

Miniature Power Supply, 2-channel, Stereo Mini-jack

**MPS6040**



Miniature Power Supply, 2-channel,  
1/4 in Stereo Jack

**MSB6000**



Master Sum Box

**SSB6000**



Stereo Satellite Box

**AHM6000**



Adjustable Headband Mount, Beige,  
small, medium or large

**AHM6001**



Adjustable Headband Mount, Black,  
small, medium or large

**MMB4066-B**



Miniature Microphone Boom, Omni, Black

**MMB4066-C**



Miniature Microphone Boom, Omni, Brown

**MMB4066-F**



Miniature Microphone Boom, Omni, Beige

**MMB4088-B**



Miniature Microphone Boom,  
Cardioid, Black

**MMB4088-C**




Miniature Microphone Boom,  
Cardioid, Brown

**MMB4088-F**




Miniature Microphone Boom,  
Cardioid, Beige

# Specifications for DPA 4060, 4061, 4062, 4063, 4065, 4066 & 4067

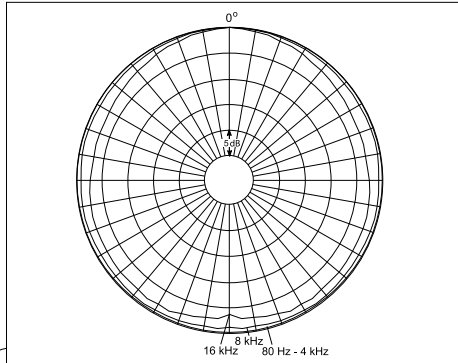

## Polar Pattern

Directional characteristics of the 4060 (normalized).

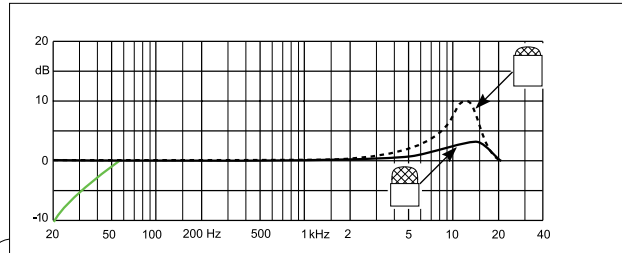

## On-Axis Frequency Response of Miniature Microphones

Dotted line is with high boost grid. Solid line is with soft boost grid.

Green line is 4067 below 50 Hz. (4065 only utilizes the soft boost frequency response).

## Directional characteristics

Omnidirectional

## Principle of operation

Pressure

## Cartridge type

Pre-polarized condenser element with vertical diaphragm

## Frequency range, $\pm 2$ dB

Soft boost grid: 20 Hz – 20 kHz, 3 dB soft boost at 8 – 20 kHz

High boost grid: 20 Hz – 20 kHz, 10 dB boost at 12 kHz

4067: 50 Hz – 20 kHz, Low-cut: -10 dB at 20 Hz

## Sensitivity, nominal $\pm 3$ dB at 1 kHz

4060: 20 mV/Pa; -34 dB re. 1 V/Pa

4061/4063/4065/4066: 6 mV/Pa; -44 dB re. 1 V/Pa

4062/4067: 1 mV/Pa; -60 dB re. 1 V/Pa

## Equivalent noise level, A-weighted

4060: Typ. 23 dB(A) re. 20  $\mu$ Pa (max. 26 dB(A))

4061/4063/4065/4066: Typ. 26 dB(A) re. 20  $\mu$ Pa (max. 28 dB(A))

4062/4067: Typ. 33 dB(A) re. 20  $\mu$ Pa (max. 37 dB(A))

## Equivalent noise level ITU-R BS.468-4

4060: Typ. 35 dB (max. 38 dB)

4061/4063/4065/4066: Typ. 38 dB (max. 40 dB)

4062/4067: Typ. 45 dB (max. 49 dB)

## Polarity

Positively increasing sound pressure produces positive going voltage on MicroDot pin.

## S/N ratio, (A-weighted) re. 1 kHz at 1 Pa (94 dB SPL)

4060: 71 dB(A)

4061/4063/4065/4066: 68 dB(A)

4062/4067: 61 dB(A)

## Total Harmonic Distortion (THD)

<1% THD up to 123 dB SPL peak

<1% THD up to 120 dB SPL RMS sine

## Dynamic range

4060: Typ. 100 dB

4061/4063/4065/4066: Typ. 97 dB

4062/4067: Typ. 90 dB

---

**Max. SPL, peak before clipping**

4060:	134 dB
4061/4065/4066:	144 dB
4062/4067:	154 dB
4063:	138 dB

**Output impedance**

30 – 40 ohm

**Cable drive capability**

Up to 300 m (984 ft)

**Power supply**

For wireless systems:

Min. 5 V – max. 50 V through DPA adapter

4063/4067: Min. 3 V – max. 50 V

With DAD6001-BC/DAD6024/DAD4099:

48 V phantom power  $\pm 4$  V for full performance

**Connector**

MicroDot

**Color**

4060/4061/4063: Black, beige, brown or white

4062/4066: Black, brown or beige

4065/4067: Black or beige

**Dimensions**

Weight: 4060/4061/4062/4063: 7.5 g (0.26 oz) incl. cable and MicroDot connector;

4065/4066/4067: 14 g (0.50 oz) incl. cable and MicroDot connector

Microphone diameter: 5.4 mm (0.21 in)

Microphone length: Max. 12.7 mm (0.5 in)

**Cable**

Cable length:

4060/4061/4062/4063: 1.8 m (5.9 ft)

4065/4066/4067: 1.2 m (3.9 ft)


SMK4060/4061: 3 m (11.8 ft)

Cable diameter: 1.6 mm (0.06 in)

**Operating temperature range**


-10 to 45° C (+14 to 113° F)

# Specifications for DPA 4071

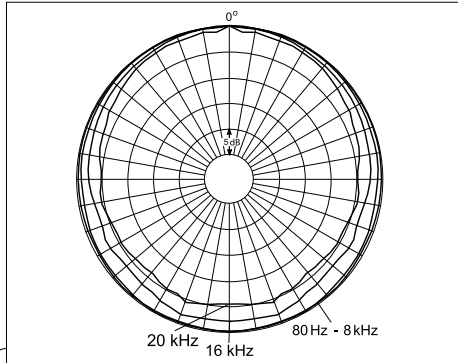

## Polar Pattern

Directional characteristics of DPA 4071 (normalized).

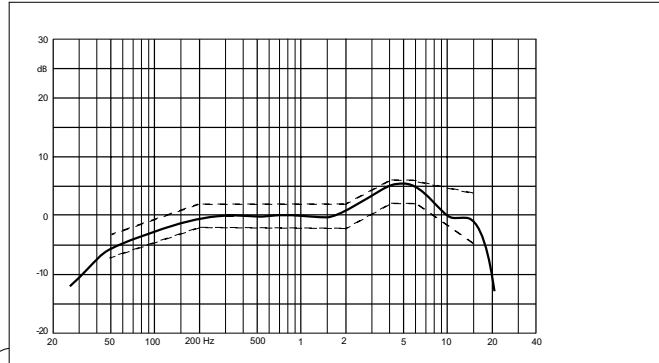

## Frequency Response

Typ. on-axis frequency response of DPA 4071 with tolerance field.

## Directional characteristics

Omnidirectional

## Principle of operation

Pressure

## Cartridge type

Pre-polarized condenser element with vertical diaphragm

## Frequency range, $\pm 2$ dB

100 Hz – 15 kHz with typ. 5 dB soft boost at 4 – 6 kHz.

## Sensitivity, nominal $\pm 3$ dB at 1 kHz

6 mV/Pa; -44 dB re. 1 V/Pa

## Equivalent noise level, A-weighted

Typ. 26 dB(A) re. 20  $\mu$ Pa (max. 28 dB(A))

## Equivalent noise level ITU-R BS.468-4

Typ. 38 dB (max. 40 dB)

## S/N ratio, (A-weighted) re. 1 kHz at 1 Pa (94 dB SPL)

68 dB(A)

## Total Harmonic Distortion (THD)

<1% up to 123 dB SPL peak

<1% up to 120 dB SPL RMS sine

## Dynamic range

Typ. 97 dB

## Max. SPL, peak, before clipping

144 dB

## Output impedance

30 – 40 ohm

## Cable drive capability

Up to 300 m (984 ft)

## Power supply

For wireless systems: Min. 5 V – max. 50 V through DPA adapter

With DAD6001-BC/DAD6024/DAD4099:

48 V phantom power  $\pm 4$  V for full performance

## Connector

MicroDot

## Color

Black, beige or white

## Dimensions

Microphone length: 17 mm (0.67 in)

Microphone diameter: 5.4 mm (0.21 in)

Weight: 9 g (0.32 oz) incl. cable and MicroDot connector

## Cable

Cable length: 1.8 m (5.9 ft)

Cable diameter: 1.6 mm (0.06 in)

## Polarity


Positively increasing sound pressure produces

positive going voltage on MicroDot pin.

## Operating temperature range


-10 to 45° C (+14 to 113° F)

# Specifications for DPA 4080

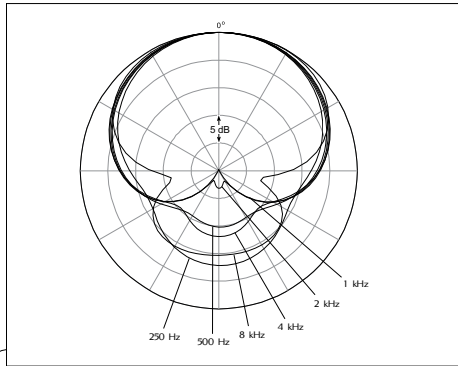

## Polar Pattern

Directional characteristics of 4080 (normalized).

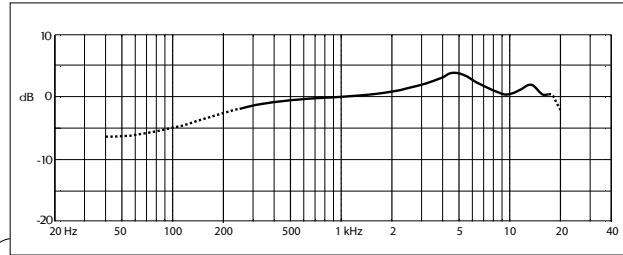

## Frequency Response

On-axis response of 4080 measured at 25 cm (10 in).

## Directional characteristics

Cardioid

## Principle of operation

Pressure gradient

## Cartridge type

Pre-polarized condenser element with vertical diaphragm

## Frequency range $\pm 2$ dB

250 Hz – 17 kHz with typ. 4 dB soft boost at 4 – 6 kHz (-5 dB at 100 Hz)

## Sensitivity, nominal, $\pm 3$ dB at 1 kHz

20 mV/Pa; -34 dB re. 1 V/Pa

## Equivalent noise level, A-weighted

Typ. 23 dB(A) re. 20  $\mu$ Pa (max. 26 dB(A))

## S/N ratio (A-weighted), re. 1 kHz at 1 Pa (94 dB SPL)

Typ. 71 dB (A)

## Total Harmonic Distortion (THD)

<1 % up to 123 dB SPL peak

<1 % up to 120 dB SPL RMS sine

## Dynamic range

Typ. 100 dB

## Max. SPL, peak before clipping

144 dB

## Output impedance

30 – 40 ohm

## Cable drive capability

Up to 300 m (984 ft)

## Power supply

For wireless systems: Min 5 V – max. 50 V through DPA adapter

With DAD6001-BC/DAD6024/DAD4099:

48 V phantom power  $\pm 4$  V for full performance

## Connector

MicroDot

## Dimensions

Microphone length: 30 mm (1.2 in)

Microphone diameter: 10 mm (0.4 in)

Capsule diameter: 5.4 mm (0.2 in)

Weight: 15 g (0.5 oz) incl. cable and MicroDot connector

## Cable

Cable length 1.2 m (4 ft)


Cable diameter: 1.6 mm (0.06 in)

## Polarity

Positively increasing sound pressure produces positive going voltage on MicroDot pin




# Specifications for DPA 4081

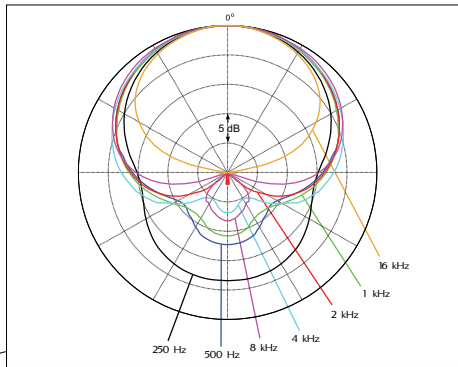

## Polar Pattern

Directional characteristics of 4081 (normalized).

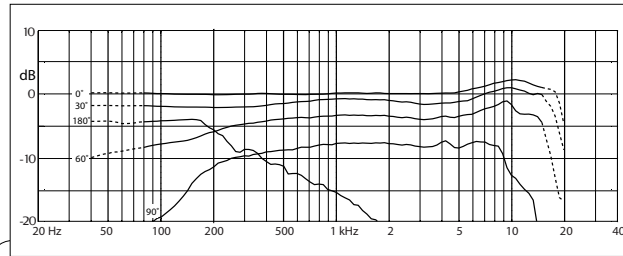

## Frequency Response

On-axis response of 4081 measured at 25 cm (10 in).

## Directional characteristics

Supercardioid

## Principle of operation

Pressure gradient

## Cartridge type

Pre-polarized condenser element with vertical diaphragm

## Frequency range

20 Hz to 20 kHz

## Frequency range, $\pm 2$ dB, 20 cm (7.9 in) distance

80 Hz to 15 kHz with 2 dB soft boost at 10 to 12 kHz

## Sensitivity, nominal, $\pm 3$ dB at 1 kHz

6 mV/Pa; -44 dB re. 1 V/Pa

## Equivalent noise level, A-weighted

Typ. 23 dB(A) re. 20  $\mu$ Pa (max. 26 dB(A))

## S/N ratio (A-weighted), re. 1 kHz at 1 Pa (94 dB SPL)

71 dB

## Total Harmonic Distortion (THD)

< 1 % up to 123 dB SPL peak, < 1 % up to 120 dB SPL RMS sine

## Dynamic range

100 dB

## Max. SPL, peak before clipping

142 dB

## Output impedance

From MicroDot: 30 to 40 ohm; from DAD6001-BC: 100 ohm

## Cable drive capability

300m (984 ft) with DAD6001-BC XLR adapter

## Output balance principle

Signal balanced with DAD6001-BC XLR adapter

## Common Mode Rejection Ration (CMRR)

> 60 dB at 50 Hz to 15 kHz with DAD6001-BC XLR adapter

## Power supply (for full performance)

Min. 5 V to max. 50 V through DPA adapter for wireless systems; 48 V phantom power  $\pm 4$  V with DAD6001-BC XLR adapter

## Current consumption

1.5 mA (microphone); 3.5 mA with DAD6001-BC XLR adapter

## Connector

MicroDot

## Color

Black

## Weight

10 g (0.35 oz)

## Capsule diameter

5.4 mm (0.2 inch)

## Cable length

2 mm (6.6 ft)

## Polarity

Positively increasing sound pressure produces positive going voltage on MicroDot pin (and pin 2 on DAD6001-BC XLR adapter)


## Operating temperature range

-40 °C to 45 °C (-40 °F to 113 °F)

## Operating relative humidity


Up to 90 %

# Specifications for DPA 4088

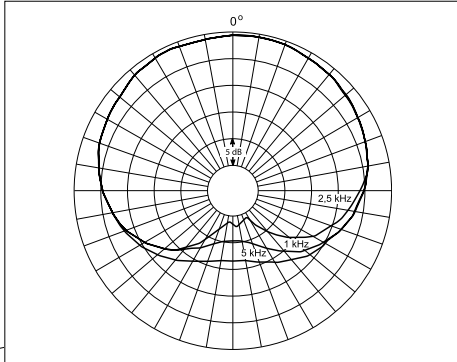

## Polar Pattern

Directional characteristics of DPA 4088 (normalized).

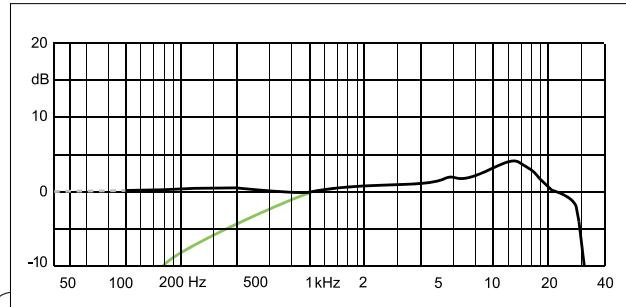

## On-Axis Frequency Response of 4088

Solid line is near field (2 – 3 cm). Green line is far field (more than 30 cm).  
Dotted line is typical low frequency in near field (estimated).

## Directional characteristics

Cardioid

## Principle of operation

Pressure gradient

## Cartridge type

Pre-polarized condenser element with vertical diaphragm

## Frequency range, $\pm 2$ dB

100 Hz – 20 kHz (4 – 6 dB soft boost at 15 kHz)

## Sensitivity, nominal $\pm 3$ dB at 1 kHz

6 mV/Pa; -44 dB re. 1 V/Pa

## Equivalent noise level, A-weighted

Typ. 26 dB(A) re. 20  $\mu$ Pa (max. 28 dB(A))

## Equivalent noise level ITU-R BS.468-4

Typ. 38 dB (max. 40 dB)

## S/N ratio, (A-weighted) re. 1 kHz at 1 Pa (94 dB SPL)

68 dB(A)

## Total Harmonic Distortion (THD)

<1 % up to 123 dB SPL peak

<1 % up to 120 dB SPL RMS sine

## Polarity

Positively increasing sound pressure produces positive going voltage on MicroDot pin.

## Dynamic range

Typ. 97 dB

## Max. SPL, peak before clipping

144 dB

## Output impedance

30 – 40 ohm

## Cable drive capability

Up to 300 m (984 ft)

## Power supply

For wireless systems: Min. 5 V – max. 50 V through DPA adapter

With DAD6001-BC/DAD6024/DAD4099:

48 V phantom power  $\pm 4$  V for full performance

## Connector

MicroDot

## Color

Black, brown or beige

## Dimensions

Weight: 14 g (0.5 oz) incl. cable and MicroDot connector

Microphone diameter: 5.5 mm (0.25 in)

Microphone length: 111 mm (0.5 in)

## Cable


Cable length: 1.2 m (3.9 ft)

Cable diameter: 1.6 mm (0.06 in)

## Operating temperature range

-10 to 45° C (+14 to 113° F)

# Specifications for DPA 4098H

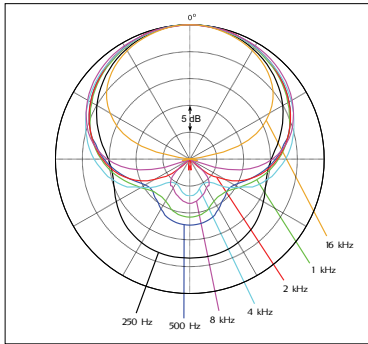

## Polar Pattern

Typical directional characteristics of 4098H (normalized).

## Directional characteristics

Supercardioid

## Principle of operation

Pressure gradient

## Cartridge type

Pre-polarized condenser

## Frequency range

20 Hz to 20 kHz

## Frequency range, $\pm 2$ dB, 20 cm (7.9 in) distance

80 Hz to 15 kHz with 3 dB soft boost at 8 to 15 kHz

## Sensitivity, nominal, $\pm 3$ dB at 1 kHz

20 mV/Pa; -34 dB re. 1 V/Pa

## Equivalent noise level, A-weighted

Typ. 23 dB(A) re. 20  $\mu$ Pa (max. 26 dB(A))

## Equivalent noise level, ITU-R BS.468-4

Typ. 35 dB (max. 38 dB)

## S/N ratio (A-weighted), re. 1 kHz at 1 Pa (94 dB SPL)

71 dB(A)

## Total Harmonic Distortion (THD)

<1 % up to 123 dB SPL peak

<1 % up to 120 dB SPL RMS sine

## Dynamic range

Typ. 100 dB

## Max. SPL, peak before clipping

134 dB

## Output impedance

From MicroDot: 30 to 40 ohm

From DAD6001: 100 ohm

## Cable drive capability

Up to 300 m (984 ft) with DAD6001 XLR adapter

## Output balance principle


Signal balanced with DAD6001 XLR adapter

## Common Mode Rejection Ratio (CMRR)

> 60 dB from 50 Hz to 15 kHz with DAD6001 XLR adapter


## Power supply (for full performance)

For wireless systems: Min. 5 V to max. 50 V through DPA adapter;  
with DAD6001: 48 V phantom power  $\pm 4$  V

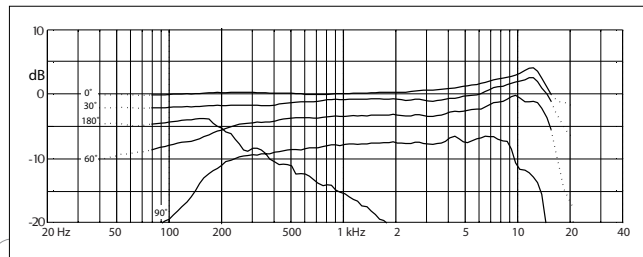

## Frequency Response

Typical on- and off-axis frequency response of 4098H at 20 cm (7.9 in) distance.

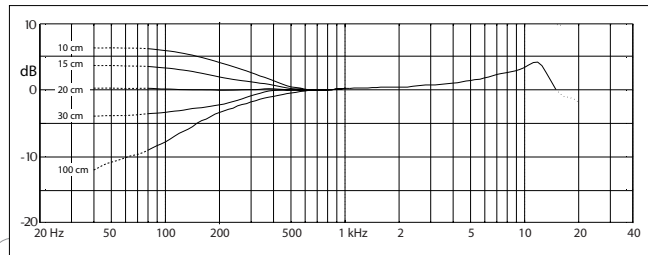

## Proximity Effect

Proximity effect exhibited by 4098H.

## Current consumption

1.5 mA (microphone)

3.5 mA with DAD6001 XLR adapter

## Connector

MicroDot

3-pin XLR-M from DAD6001 XLR adapter

## Color

Black (4098HB)

White (4098HW)

## Weight

5 g (0.18 oz)

## Microphone length

154 mm (6 in)

## Capsule diameter

5.4 mm (0.2 in)

## Microphone diameter

10 mm (0.39 in)

## Gooseneck length

95 mm (3.7 in)

## Polarity

Positively increasing sound pressure produces positive-going voltage at MicroDot pin (and pin 2 on DAD6001 XLR adapter)


## Operating temperature range

-40 °C to +50 °C (-40 °F to 113 °F)

## Operating relative humidity (RH)

Up to 90 %

# Specifications for DPA BLM4060

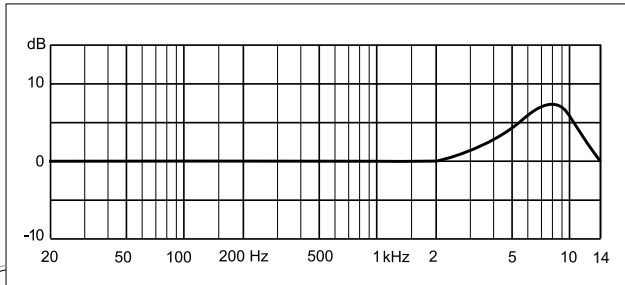

**On-Axis Frequency Response of BLM4060**

## Directional characteristics

Omnidirectional, hemisphere

## Principle of operation

Pressure

## Cartridge type

Pre-polarized condenser element

## Frequency range, $\pm 2$ dB

20 Hz – 14 kHz

(with a 7 dB soft boost at 8 kHz)

## Sensitivity, nominal $\pm 3$ dB at 1 kHz

20 mV/Pa -34 dB re. 1 V/Pa

## Equivalent noise level, A-weighted

Typ. 23 dB(A) re. 20  $\mu$ Pa (max. 26 dB(A))

## Equivalent noise level ITU-R BS.468-4

Typ. 35 dB (max. 38 dB)

## S/N ratio, (A-weighted) re. 1 kHz at Pa (94 dB SPL)

71 dB(A)

## Total Harmonic Distortion (THD)

<1% up to 123 dB SPL peak

<1% up to 120 dB SPL RMS sine

## Dynamic range

Typ. 100 dB

## Max. SPL, peak before clipping

134 dB

## Output impedance

From MicroDot: 30 – 40 ohm

From DAD6001: 100 ohm

## Cable drive capability

Up to 300 m (984 ft)

## Power supply

For wireless systems: Min. 5 V – max. 50 V through DPA adapter

With DAD6001-BC/DAD6024/DAD4099:

48 V phantom power  $\pm 4$  V for full performance

## Connector

MicroDot/XLR 3-pin

## Finish

Black rubber disc mounted in stainless steel base

## Dimensions

Diameter: 100 mm (4 in)

Height: 12 mm (0.5 in)

Weight: 240 g (8.5 oz) excl. cable

## Cable

Cable length: 3 m (10 ft)

Cable diameter: 1.6 mm (0.06 in)

Cable color: Black

## Polarity

Positively increasing sound pressure produces

positive going voltage on MicroDot pin/pin2 on XLR connector

## Operating temperature range

-10 to 45° C (+14 to 113° F)



### The DPA success

The reason for our success is simple: DPA's ultimate goal is to provide you – whether you're in live sound, recording, theater or broadcast – with the absolute finest possible microphone solutions for your tasks. We take no shortcuts in our design processes nor make any compromises in our manufacturing. As a result, our products are globally praised for their exceptional clarity and transparency, superb specifications, supreme reliability and, above all, pure, uncolored and undistorted sound.

Regardless of whether you are a longtime DPA user or potential new customer, we thank you for your interest in our products and look forward to delighting you beyond your expectations.



**DPA**   
MICROPHONES

**DPA**   
MICROPHONES

WWW.DPAMICROPHONES.COM



**Head Office**

DPA Microphones A/S  
Gydevang 42-44  
DK-3450 Alleroed, Denmark  
Tel: +45 4814 2828  
Fax: +45 4814 2700  
info@dpamicrophones.com  
www.dpamicrophones.com

**US Sales Office**

DPA Microphones, Inc.  
1500 Kansas Avenue, Unit 3 A  
Longmont, Colorado 80504  
Tel: +1 303 485 1025  
Fax: +1 303 485 6470  
info-usa@dpamicrophones.com  
www.dpamicrophones.com