

Blackmagic URSA Mini 4K EF



The compact URSA Mini camera with EF lens mount, 4K Super 35 image sensor and global shutter is lightweight and perfectly balanced for handheld use and comfortable enough for all day shooting. URSA Mini 4K EF features professional 12G-SDI connections, 5" fold out touchscreen monitor and side grip with camera control functions as well as dual CFast card recorders, built in stereo microphones and more.

\$2,995

Camera Features

Sensor Size

22mm x 11.88mm (Super35).

Shooting Resolutions

4000 x 2160

3840 x 2160

1920 x 1080

Frame Rates

Maximum sensor frame rate dependent on resolution and codec selected. Project frame rates of 23.98, 24, 25, 29.97, 30, 50, 59.94 and 60 fps supported.

Dynamic Range

12 stops

Focus

Focus button turns on peaking, auto focus available using compatible lenses.

Iris Control

Iris button automatically adjusts the lens iris settings on compatible lenses so no pixel is clipped in film mode. Scene average auto exposure in video mode.

Lens Mount

EF Mount

Screen Dimensions

1 x 5" - 1920 x 1080

Screen Type

LCD capacitive touchscreen

Metadata Support

Automatic camera data and user data such as shot number, filenames and keywords.

Controls

Touchscreen menus on 5" screen. Push buttons for other controls. 2 assignable shortcut keys.

Microphone

2 x built in cardioid microphones for stereo recording with -15dB pad and low cut filter.

Speaker

1 x mono speaker, enabled in playback mode when headphones are not used.

Storage Features

Storage Rates

4000 x 2160

CinemaDNG RAW - 265 MB/s

CinemaDNG RAW 3:1 - 125 MB/s

3840 x 2160

Apple ProRes 444 XQ - 250 MB/s

Apple ProRes 444 - 165 MB/s

Apple ProRes 422 HQ - 110 MB/s

Apple ProRes 422 - 73.6 MB/s

Apple ProRes 422 LT - 51 MB/s

Apple ProRes Proxy - 22.4 MB/s

1920 x 1080

Apple ProRes 444 XQ - 62.5 MB/s

Apple ProRes 444 - 41.25 MB/s

Apple ProRes 422 HQ - 27.5 MB/s

Apple ProRes 422 - 18.4 MB/s

Apple ProRes 422 LT - 12.75 MB/s

Apple ProRes Proxy - 5.6 MB/s

Storage rates based on 30 frames per second.

Storage Type

2 x CFast 2.0

Please refer to either the Manual or the Information Note at www.blackmagicdesign.com/support for compatible media.

Recording Formats

Lossless CinemaDNG RAW and RAW 3:1 with film dynamic range at 4000 x 2160. Apple ProRes XQ, 444, 422 HQ, 422 LT and 422 Proxy at 3840 x 2160 and 1920 x 1080 with either film or video dynamic range.

Connections

SDI Video Output

1 x 12G-SDI BNC 10-bit 4:2:2

1 x 3G-SDI BNC 10-bit 4:2:2

SDI Video Input

SDI Video Input

Ref/ Timecode Input

1 x BNC reference or timecode input with automatic detection

Analog Audio Input

2 x XLR analog switchable between mic and line levels. Phantom power support.

SDI Audio Output

2 channel

Headphones


3.5mm stereo headphone jack

Remote Control

2 x 2.5mm LANC input for Rec Start/ Stop, plus Iris and Focus control using compatible lenses.

Computer Interface

USB 2.0 Mini-B port for software updates.

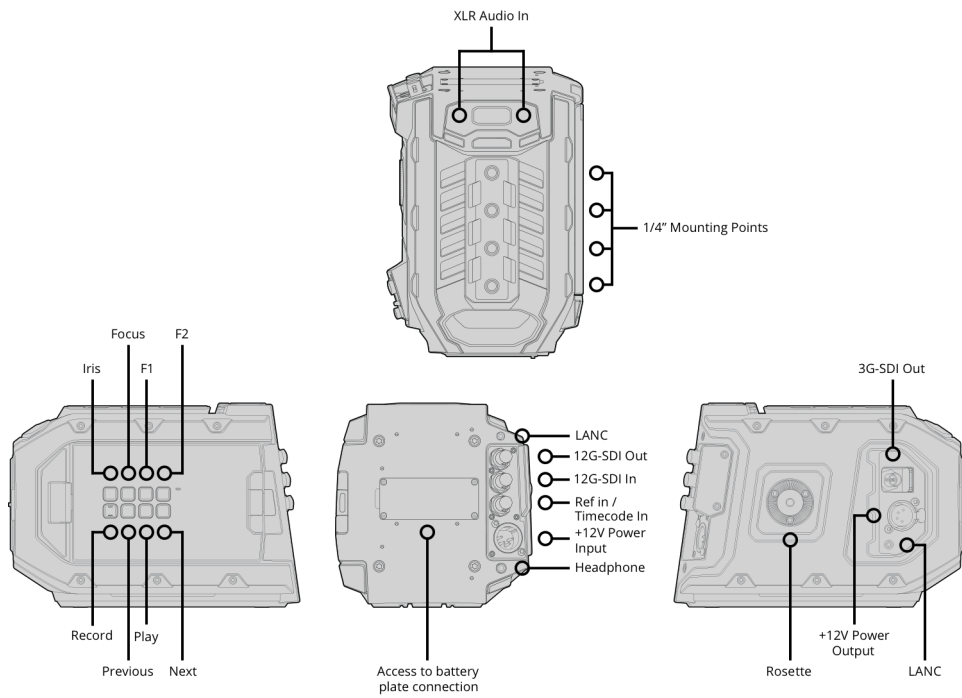

Standards

SDI Compliance

SMPTE 292M, SMPTE 424 Level B, Draft
SMPTE 2081-1, Draft SMPTE 2082-1

SDI Audio Sampling

48 kHz and 24 bit

Software

Software Included

DaVinci Resolve Studio grading software including Resolve USB dongle for Mac OS X and Windows.

Blackmagic Media Express software.

Blackmagic Disk Speed Test.

Blackmagic Camera Setup.

Operating Systems



Mac OS X 10.10 Yosemite,
Mac OS X 10.11 El Capitan
or later.



Windows 8.1 or
Windows 10.

Power Requirements

External Power Input

1 x 4-pin XLR port for external power or battery use.

1 x 4-pin XLR port for external power or battery use. 1 x 12-pin moxex connector on rear battery plate.

Custom V-mount battery plate with D-tap +12V regulated output from camera.

External Power Output

1 x 12V output using 4-pin XLR for powering external accessories such as EVF.

1 x 12V regulated output from rear moxex 12-way connector.

Power

Rear camera mount compatible with industry standard V-mount or Gold Mount battery plates.

Accessories

Optional Accessories

Blackmagic URSA Mini Shoulder Kit including top handle and extender arm

Blackmagic URSA Viewfinder

VLock Battery Plate

Physical Specifications



Environmental Specifications

Operating Temperature

0° to 40° C (32° to 104° F)

Storage Temperature

-20° to 45° C (-4° to 113° F)

Relative Humidity

0% to 90% non-condensing

What's Included

Blackmagic URSA Mini 4K EF

Turret Dust Cap

Side Handle with LANC Cable and strap

Power supply

SD card with software and manual

DaVinci Resolve Studio USB dongle

Warranty

Product Warranty

12 Month Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2016, all rights reserved.
All trademarks are property of their respective owners. MSRP excludes sales taxes/duties and shipping costs.

Blackmagic Design Authorized Reseller